

# **B**lack Square



**ANALOG**

**BARON**

**OPERATIONS MANUAL**

For Microsoft Flight Simulator

Published By:

**Just Flight**<sup>™</sup>

# **B**lack Square

*“Virtual Aircraft. Real Engineering.”*  
**Analog Baron User Guide**

Please note that Microsoft Flight Simulator must be correctly installed on your PC prior to the installation and use of this Baron aircraft simulation.

## Contents

<b>Introduction</b>	<b>8</b>
<b>Feature Overview</b>	<b>9</b>
Systems	9
Checklists	9
Sounds	9
Model	10
Cockpit	10
Flight Dynamics	10
<b>Aircraft Specifications</b>	<b>11</b>
Aircraft Performance (Normally Aspirated)	12
Aircraft Performance (Pressurized)	12
V-Speeds	13
Engine Limitations	13
Turbocharger Limitations	13
Other Operating Limitations	14
Paint Schemes	14
<b>Instrumentation/Equipment List</b>	<b>15</b>
Main Panel	15
Avionics	15
Electrical/Miscellaneous	15
<b>Installation, Updates &amp; Support</b>	<b>17</b>
Installation	17
<b>Installing the PMS GTN 750</b>	<b>17</b>
<b>Installing The Working Title GNS 530/430</b>	<b>18</b>
<b>TDS GTNxi 750 Integration</b>	<b>18</b>
Accessing the Aircraft	19
Uninstalling	19
Updates and Technical Support	19

Regular News	19
<b>Liveries &amp; Exterior Mods</b>	<b>20</b>
Compatibility	20
Example Livery Package	20
Installation	20
<b>Cockpit &amp; System Guide</b>	<b>23</b>
<b>Main Panel</b>	<b>23</b>
Annunciator Panel	23
True Airspeed Indicator	24
Bendix/King KI 256 Vacuum Artificial Horizon	25
Bendix/King KEA 130A Altimeter	26
Bendix/King KI 229 Radio Magnetic Indicator (RMI)	27
Bendix/King KI 525A Horizontal Situation Indicator (HSI)	28
Vertical Speed Indicator	29
Bendix/King KI 206 Localizer	30
Mid-Continent Turn Coordinator	31
Bendix/King KRA-10 Radar Altimeter	32
Engine Instrumentation & Fuel Quantity Indicators	33
Duplicate Copilot Instrumentation	34
<b>Avionics</b>	<b>35</b>
Garmin GMA 340 Audio Panel	35
KMA 24 Audio Panel	36
Garmin GTN 750 (Com1)	37
Garmin GNS 530/430 (Com1/Com2)	37
Bendix/King KX-155B (Com1/Com2)	38
Bendix/King KNS-81 RNAV Navigation System	38
Bendix/King KR 87 ADF	38
Bendix/King KDI 572R DME	39
Bendix/King KFC 150 Autopilot	40
Bendix/King KAS 297B Altitude Selector	41
JPI EDM-760 Engine Monitor	41
Bendix RDR 1150XL Color Weather Radar	42
Garmin GTX 327 Transponder	43
<b>Electrical/Miscellaneous</b>	<b>44</b>
Circuit Breakers	44
Voltmeter & Ammeters	44
Bendix/King KA 51B Remote Compass Synchroscope	44
Propeller Synchrophaser	45
Propeller Amps Indicator	46
Deicing Boot Pressure Indicator	46
Instrument Air Indicator	47

Oxygen Pressure Gauge	47
Yoke-Mounted Digital Chronometers	48
Hobbs Timer & Carbon Monoxide Detector	48
Cabin Pressurization System	49
Low Thrust Detector	51
<b>Lighting Controls</b>	<b>52</b>
Cabin Lighting	52
Panel Lighting	52
Cockpit Lighting	52
<b>State Saving</b>	<b>53</b>
<b>Environmental Simulation &amp; Controls</b>	<b>53</b>
Cabin Temperature Monitoring	54
Cabin Environmental Controls	54
<b>Reciprocating Engine &amp; Turbocharger Simulation</b>	<b>57</b>
<b>Fuel Injected Engine Operation</b>	<b>57</b>
Cold Engine Starting	57
Hot Engine Starting	57
Flooded Engine Starting	58
Backfiring	58
Spark Plug Fouling	58
<b>Turbocharged Operation</b>	<b>59</b>
Turbocharger Basics	59
Critical Altitude	59
Operation Before & During Takeoff	60
Operation During Climb & Cruise	60
Operation During Landing & Securing	60
<b>Tips on Operation within MSFS</b>	<b>61</b>
Engine Limits and Failures	61
Electrical Systems	61
Deicing and Anti-Icing Systems	62
Third Party Navigation and GPS Systems	62
Mixture & Fuel Flow	63
<b>Failure Configuration &amp; System Status</b>	<b>64</b>
Systems Screen	64
Failures Screen	64
Random Failures Screen	65
Scheduled Failures Screen	66
Active Failures Screen	67
Failure System HTML Interface	68

<b>List of Possible Failures</b>	<b>69</b>
Major System Failures	69
Circuit Breaker Protected Failures	69
<b>Miscellaneous Systems</b>	<b>70</b>
Audible Warning Tones	70
Range Extending Devices (Tip Tanks & Winglets)	71
<b>Turbocharger Sound</b>	<b>72</b>
VOR & ADF Signal Degradation	72
<b>Overview Electrical Schematic</b>	<b>73</b>
<b>Using the KNS-81 RNAV Navigation System</b>	<b>74</b>
The Concept	74
How it Works	74
“Moving” a VOR	74
Data Entry	75
Data Storage Bins	75
Distance Measuring Equipment	75
Modes of Operation	76
Other Possible Uses	76
Recommended Skills	77
Direct Flight to Airport Tutorial	77
<b>Using the JPI EDM-760 Engine Monitor</b>	<b>81</b>
Static Displays	82
Temperature Columns	83
Lean Find Mode	84
Leaning Rich of Peak	85
Leaning Lean of Peak	86
Alarms	87
<b>Normal Checklists</b>	<b>88</b>
Before Starting Engine	88
Engine Start (Cold)	88
Engine Start (Hot)	88
Engine Start (Flooded)	89
After Starting	89
Starter Does Not Disengage	89
Runup	89
Before Takeoff	90
Takeoff	90
Max Continuous Power	90
Enroute Climb	90
Cruise	90
Descent	90

Approach	90
Landing	91
After Landing	91
Shutdown & Securing	91
Instrument Markings & Colors	91
<b>Abnormal &amp; Emergency Checklists</b>	<b>92</b>
Engine Fire (Ground)	92
Engine Failure (Takeoff)	92
Engine Failure (In Flight)	92
Rough Running Engine	92
Engine Fire (Flight)	92
Emergency Descent	92
Maximum Glide	92
Electrical Smoke or Fire	92
High Pressure Differential	93
Cabin Depressurization	93
Turbocharger Failure	93
Carbon Monoxide Detected	93
Alternator Failure	93
Dual Instrument Air Failure	93
Severe Icing Encounter	93
Remote Compass Misalignment	93
Autopilot Failure or Trim Runaway	93
AC DOOR EXTEND Illuminated in Flight	93
Landing Gear Manual Extension	94
Landing Gear Up after Man Ext	94
Flap Failure	94
Balked Landing	94
No Power Landing	94
<b>More Information on Operation</b>	<b>95</b>
<b>Frequently Asked Questions</b>	<b>96</b>
Will I still be able to fly the default G1000 G58 Baron?	96
Are liveries for the default MSFS G58 Baron Compatible?	96
Why is the GTN 750 GPS screen black?	96
Why do my GNS 430/530 displays not look like the screenshots?	96
Why won't the autopilot track to the KNS-81 RNAV waypoint?	96
Why is the state of my aircraft and radios not saved/recalled?	96
Do I need to have the original default aircraft installed?	97
Why can't I see the exterior of the aircraft, or why are there pink checkerboard textures on the inside of the cockpit?	97
Why does the engine not fail when limits are clearly exceeded?	97

Why don't the doors open?	97
I have the TDS or PMS GTN 750 installed. Why do they not automatically show up on the panel?	97
Why does the mixture behave strangely in the turbocharged version, and I cannot bind it to hardware controls?	98
Why can't I start the engines?	98
Why is the autopilot behaving strangely, not changing modes, or not capturing altitudes?	98
Is this compatible with the G58 Baron Improvements Mod?	98
<b>Change Log</b>	<b>99</b>
v1.0 - Initial Release	99
<b>Credits</b>	<b>100</b>
<b>Dedication</b>	<b>100</b>
<b>Copyright</b>	<b>100</b>

# Introduction

The Baron 58 was introduced in 1969 as an incremental improvement on the already successful Baron 55, which itself was developed from the Travel Air 95. The Baron 58 made use of the Bonanza's fuselage and more modern control surfaces than the Travel Air, creating a solid competitor to the industry's other light twins. Today, the Baron 58 remains one of the few light twins still in production, with over 7,000 aircraft produced. This particular model of Baron depicts the original model 58 of the early-2000's with 300 hp engines, and the 1985 "58P" with turbocharged engines, a pressurized cabin, and winglets for extra range. The pressurized Baron is relatively rare, with under 500 aircraft produced, and a time limited airframe. For many business travelers, the 58P represented the perfect cross-country machine, so much so that it was discontinued to promote sales of the King Air 90, the smallest of the King Air offerings.

Black Square's Analog Baron brings you a completely new interior, panel, and systems with the default MSFS G58 Baron exterior model, including added winglets. This product contains both normally aspirated (B58), and pressurized (B58P) aircraft with an advanced reciprocating engine simulation, and features analog instrumentation, swappable radio configurations, an overhauled electrical system with every circuit breaker, meter, switch, and knob functioning. Black Square's failure system allows for persistent wear, MTBF, and scheduled failures for nearly every component in the aircraft, many with multiple different failure modes. The fully 3D gauges are modeled and coded to meticulously match their real world counterparts, with reference to real world manuals. No piece of equipment appears in a Black Square aircraft without a real world unit as reference. Radionavigation systems are available from several eras of the Baron's history, so users can fly without GPS via a Bendix KNS-81 RNAV system, or with the convenience of a Garmin GTN 750 (PMS50 or TDS). Other radio equipment includes KX-155 NAV/COM radios, GNS 530, GNS 430, KR 87 ADF, KDI 572 DME, GTX 327 Transponder, KFC 150 Autopilot, and a Bendix RDR1150XL Color Weather Radar. A 100 page manual provides instruction on all equipment, and 42 in-game checklists with control/instrument highlighting are included for normal and emergency procedures.

Primarily analog instrumentation augmented with modern radionavigation equipment is still the most common aircraft panel configuration in the world. Challenge your piloting skills by flying IFR to minimums with a fully analog panel, and no GPS. You'll be amazed at the level of skill and proficiency you can achieve to conquer such adversity, and how it will translate to all your other flying. You also may find the analog instrumentation much easier to read with the limited number of pixels available on a computer monitor, and even more so in VR.

**NOTE: This product is an INTERIOR AND SYSTEMS OVERHAUL ONLY that makes use of the default MSFS Baron exterior visual model, and requires AT LEAST THE DELUXE VERSION of MSFS to be installed.** Improvements have been made to almost all aspects of the aircraft, **except** the exterior. All default Baron liveries are compatible with this product.

**For more information on this product's capabilities and a list of all included avionics and equipment, see the extensive operating manual at [www.JustFlight.com](http://www.JustFlight.com).**



## Feature Overview

### Systems

Black Square's overhauled cockpits with analog instrumentation go far beyond a visual upgrade. Included, you will find a complete redesign of all aircraft systems to more closely match the real aircraft, with a focus on electrical systems. Also included are more accurate weight and balance, lighting systems, flight dynamics, and ground handling. Enjoy features, like...

- Reciprocating engine simulation with fouling, vapor-lock, flooding, and backfires
- The most realistic turbocharger simulation in Microsoft Flight Simulator to date
- Turbocharger-driven pressurization & door seal system. Door seals reduce cabin noise.
- Completely intractable electrical system with 4 buses and 85 circuits
- Engine leaning optimization "Lean Find" on EDM-760 engine monitor, and status alarms
- Engine limit excursions that decrease engine health and will eventually lead to failure
- Selective state saving for radio selection, radio frequency memory, cabin aesthetics, etc.
- 100+ system failures, set via in-cockpit interface. Either random based on settable MTBF, or schedulable, with optional time acceleration.
- Cabin environmental control system for heating, air conditioning, ventilation, ram air cooling. Cool things off by opening a window, or watch the airplane heat up in the sun.
- Crew/Passenger oxygen system that depletes according to pressure altitude, passenger occupancy, and their weight. Working carbon monoxide detector.
- Mathematically accurate VOR & ADF signal attenuation and noise, and remote compass
- Working ice protection systems, optional winglets, and tip tank transfer pumps

### Checklists

Over 500 checklist items are provided for 40+ Normal, Abnormal, and Emergency procedures in textual form in the manual, and in-game, using the MSFS native checklist system with control and instrument highlighting. If it's in the checklist, it's settable in the aircraft!

### Sounds

Black Square's Analog Baron features the default MSFS-native (Wwise) 3D G58 Baron sound package, with new custom sounds added for warnings, environmental control systems, electronics, turbocharger, engine cooling, and more. The default sounds have been carefully assigned to all interactable cockpit elements for an authentic 3D spatial experience.

- Rich audio for every switch, button, lever and electrical system
- Detailed physics-based effects on engine and wind noise
- Accurately positioned 3D sound sources (best enjoyed in VR!)

## Model

- Accurately modeled B58 and B58P Baron interior ONLY (uses default exterior model), created from hundreds of reference photos and technical documentation.
- 100% MSFS native animation code for the smoothest animations and cockpit interactions using either legacy or new cockpit interaction modes
- PBR (Physically Based Rendering) materials with real-time environment reflections for superb quality and realism, and vector-graphic-like decal quality.
- Detailed normal mapping for leather, fabric, plastic, stitches, scratches, carpet, and tooling marks, resulting in a texture resolution of 10,000 pixels per square inch (90.0kB)

## Cockpit

- Greatly enhanced instrument panel detail compared to default aircraft with every label and marking in its place. If it appears in the real aircraft, you can interact with it!
- Custom coded steam gauges with lowpass filtering, needle bounce, and physics provide ultra-realistic and silky smooth animations like you've never seen before.
- Carefully modeled components match the depth and character of the real instrumentation, based on reference photos, schematics, and real world measurements. Unlike other expensive Flight Sim aircraft, every piece of equipment that appears in a Black Square aircraft is modeled after a real piece of aircraft equipment, and will behave the same way in its primary functionality.
- Every knob, switch, and button is interactable and implemented, along with its respective electrical circuitry. Turn systems on and off or pull circuit breakers to see the impact it has on your generators and battery via the analog meters. Automatic standby generators, and standby gyros are also simulated. Many pieces of equipment respond correctly to electrical configurations with warning messages and diagnostic codes.
- Fully 3D cockpit lighting technology for every gauge and panel, with ambient bounce lighting for a more immersive nighttime experience that won't leave you fumbling around in unrealistically dark spots.
- 4096x4096 (4K) PBR textures on cockpit and panel for crisp instrumentation. Even see the fingerprints on instrument glass!
- Hideable yokes, adjustable sun visors, and other cockpit aesthetics

## Flight Dynamics

The Analog Baron features an improved flight model compared to the default Baron with tweaks based on operator feedback and real flight data. Drag varies with cowl flap setting and air conditioning condenser scoop position. Engine damage and fouling produces a rough running engine and decreased performance.

## Aircraft Specifications

Length Overall	29'11"
Height	9'2"
Wheel Base	7'0"
Track Width	9'7"
Wingspan	37'10" (39'6" with Winglets)
Wing Area	199.0 sqft.
Flight Load Factors	+4.0/-1.3 G's (+2.0/-1.1 G's with Flaps Down)
Design Load Factor	150%
Cabin W/L/H	42" x 12'7" x 50"
Oil Capacity	16 U.S. Quarts
Seating	6
Wing Loading	27.6 lbs/sqft
Power Loading	8.45 lbs/hp
Engine	300 HP (224 kW) Continental IO-550-C. Normally aspirated, Fuel-injected, direct-drive, air-cooled, horizontally opposed, 6-cylinder, 550-cubic-inch displacement.
Engine (Pressurized)	325 HP (242 kW) Continental TSIO-520-WB. Turbocharged, Fuel-injected, direct-drive, air-cooled, horizontally opposed, 6-cylinder, 520-cubic-inch displacement.
Propeller	3-Blade McCauley, Constant Speed, Aluminum, Hydraulically Actuated, 78 inch propeller. Fully fine blade angle of 15.2°, Low pitch blade angle of 55.0°, and feathering angle of 82.5°.
Approved Fuel Grades	Aviation Gasoline Grade 100LL (blue) Aviation Gasoline Grade 100 (green)
Fuel Capacity	Total Capacity: 172 U.S. Gallons Total Capacity Each Tank: 86 U.S. Gallons Total Usable: 166 U.S. Gallons Optional Tip Tanks: +30 U.S. Gallons, 196 U.S. Gallons Usable
Electrical System	
Voltage:	28 VDC
Battery:	24V, 12 amp-hour, sealed lead acid battery
Alternators:	28V, 80 amp @ 2,300 RPM, each engine
Pressurization System	3.9 PSI Maximum Pressure Differential Pressurization Rate Controller 150 ft/min to 2,000 ft/min Minimum/Maximum attainable altitude -1,000 ft / 15,000 ft

### Aircraft Performance (Normally Aspirated)

Maximum Cruising Speed	198 ktas
Normal Cruising Speed	180 ktas
Economy Cruising Speed	153 ktas
Takeoff Distance	2,345 ft
Takeoff Ground Roll	1,373 ft
Landing Distance	2,428 ft
Landing Ground Roll	1,378 ft
Normal Range	1,013 nm
Maximum Range	1,276 nm
Rate of Climb	1,610 ft/min
Service Ceiling	20,668 ft
Empty Weight	3,120 lbs
Max Ramp Weight	5,520 lbs
Max Takeoff Weight	5,500 lbs
Max Landing Weight	5,500 lbs
Useful Load	2,400 lbs
Usable Fuel Weight	996 lbs
Full Fuel Payload	1,404 lbs
Maximum Operating Temp.	+53°C
Minimum Operating Temp.	-54°C

### Aircraft Performance (Pressurized)

Maximum Cruising Speed	261 ktas
Normal Cruising Speed	245 ktas
Economy Cruising Speed	166 ktas
Takeoff Distance	2,643 ft
Takeoff Ground Roll	1,555 ft
Landing Distance	2,490 ft
Landing Ground Roll	1,440 ft
Normal Range	1,500 nm
Maximum Range	1,627 nm
Rate of Climb	1,850 ft/min
Service Ceiling	25,000 ft
Empty Weight	4,010 lbs
Max Ramp Weight	6,240 lbs
Max Takeoff Weight	6,200 lbs
Max Landing Weight	6,200 lbs
Useful Load	2,230 lbs
Usable Fuel Weight	1,176 lbs
Full Fuel Payload	1,200 lbs
Maximum Operating Temp.	+53°C
Minimum Operating Temp.	-54°C

## V-Speeds

Vr	81 kts	(Rotation Speed)
Vs	84 kts	(Clean Stalling Speed)
Vso	78 kts	(Dirty Stalling Speed)
Vmc	81 kts	(Minimum Controllable Speed w/ Critical Engine Inoperative)
Vx	95 kts	(Best Angle of Climb Speed)
Vy	115 kts	(Best Rate of Climb Speed)
Vxse	102 kts	(Best Single Engine Angle of Climb Speed)
Vyse	115 kts	(Best Single Engine Rate of Climb Speed)
Va	156 kts	(Maneuvering Speed)
Vg	115 kts	(Best Glide Speed)
Vfe	122 kts	(Maximum Full Flap Extension Speed)
Vfa	152 kts	(Maximum Approach Flap Extension Speed)
Vle	152 kts	(Maximum Landing Gear Extension Speed)
Vno	195 kts	(Maximum Structural Cruise Speed - exceed only in clean air)
Vne	223 kts	(Do Not Exceed Speed)

## Engine Limitations

Engine Speed	2,700 RPM
Cylinder Head Temperature	460°F (238°C)
Exhaust Gas Temperature	1650°F (900°C)
Oil Temperature	240°F (116°C)
Oil Pressure	30 PSI (min.) 100 PSI (max.)
Fuel Pressure	1.5 PSI (min.) 17.5 PSI (max.)
Manifold Pressure	29.6 inHg (Normally Aspirated) 39.5 inHg (Turbocharged)

## Turbocharger Limitations

Critical Altitude	20,000 ft (varies with throttle and atmospheric conditions)
Turbine Inlet Temperature	1650°F (900°C)
Maximum Turbine RPM	125,000 RPM

DO NOT fully retard throttle above critical altitude. Engine combustion may cease.

NOTE: The 58P is a “turbocharged” aircraft, as opposed to a “turbonormalized” aircraft, meaning that the turbocharger is capable of supplying, and the engine is capable of using, intake manifold pressures greater than that of sea level (29.9 inHg).

## Other Operating Limitations

- Do not engage starter for more than 30 seconds in any 4-minute period.
- Do not take-off when fuel quantity gauges indicate in the yellow arc, or with less than 20 gallons in each main tank.
- Maximum slip duration: 30 seconds.
- Do not attempt to fully retract landing gear with manual hand crank handle. Doing so may cause damage to worm gear shaft.
- Avoid cooling cylinders at rates greater than 60°F (33°C) per minute.

## Paint Schemes

The Analog Baron comes with six additional color schemes in the default paint layout to distinguish it from the always available default G58 Baron in aircraft selection menus, and screenshots; however, any number of additional liveries may be adapted for the Analog Baron, and require zero changes to make liveries intended for the default G58 Baron compatible with the Analog Baron. For instructions on how to use your favorite default G58 Baron liveries with the Analog Baron, see the “Liveries” section of this manual. Note: Default paint schemes for the Analog Baron can implement any tail number, which will be displayed on the interior and exterior of the aircraft.

## Instrumentation/Equipment List

### Main Panel

- Glareshield Annunciator Panel
- True Airspeed Indicator
- Bendix/King KI 256 Vacuum Artificial Horizon
- Bendix/King KEA 130A Altimeter
- Bendix/King KI 229 Radio Magnetic Indicator (RMI)
- Bendix/King KI 525A Horizontal Situation Indicator (HSI)
- Vertical Speed Indicator
- Bendix/King KI 206 Localizer
- Mid-Continent Turn Coordinator
- Bendix/King KRA-10A Radar Altimeter
- Engine Instrumentation & Fuel Quantity Indicators
- Standby Copilot Instrumentation

### Avionics

- Garmin GMA 340 Audio Panel
- Bendix/King KMA 24 Audio Panel
- Garmin GTN 750 (Com1) (PMS50 or TDS)
- Garmin GNS 530W (Com1)
- Garmin GNS 430W (Com2)
- Bendix/King KX-155B (Com1/Nav1)
- Bendix/King KX-155B (Com2/Nav2)
- Bendix/King KNS-81 RNAV Navigation System (incl. Nav3)
- Bendix/King KR 87 (ADF)
- Bendix/King KDI 572R (DME)
- Bendix/King KFC 150 Autopilot
- Bendix/King KAS 297B Altitude Selector
- JPI EDM-760 Engine Monitor
- Bendix RDR1150XL Color Weather Radar
- Garmin GTX 327 Transponder

### Electrical/Miscellaneous

- 80+ Circuit Breakers
- Voltmeter & Ammeters
- Bendix/King KA 51B Remote Compass Synchroscope
- Propeller Synchrophaser
- Propeller Amps Indicator
- Instrument Air Indicator
- Deicing Boot Pressure Indicator

- Oxygen Pressure Gauge
- Yoke-Mounted Digital Chronometers
- Hobbs Timer & Carbon Monoxide Detector
- Cabin Pressurization Controller
- Low Thrust Detector



# Installation, Updates & Support

## Installation

You can install this aircraft as often as you like on the same computer system:

1. Click on the 'Account' tab on the Just Flight website.
2. Log in to your account.
3. Select the 'Your Orders' button.
4. A list of your purchases will appear and you can then download the software you require.
5. Run the downloaded installation application and follow the on-screen instructions

If you already have an earlier version of this software installed, the installation application will detect this and update your existing software to the new version without you needing to uninstall it first.

**NOTE: THE FOLLOWING DOWNLOADS ARE OPTIONAL**, and not required to enjoy the base functionality of this Black Square aircraft; however, they are highly recommended for the most immersive experience possible.

## Installing the PMS GTN 750

1. Go to the following link, and click download for the **FREE GTN 750 Mod**.  
<https://pms50.com/msfs/downloads/gtn750-basic/>
2. Move the "pms50-instrument-gtn750" archive (zipped folder) from your browser's download location (downloads folder by default) to your desktop, and extract (unzip) the archive by right clicking, and selecting "Extract All".
3. Drag the resulting "pms50-instrument-gtn750" folder into your Microsoft Flight Simulator Community Folder.

If you don't know how to locate your MSFS Community Folder, you should be able to find it in one of the following locations, based on the service you used to purchase the simulator.

### For the Windows Store install:

C:\Users\[YourUserName]\AppData\Local\Packages\Microsoft.FlightSimulator\_8wekyb3d8bbwe\LocalCache\Packages\

### For the Steam install:

C:\Users\[YourUserName]\AppData\Local\Packages\Microsoft.FlightDashboard\_8wekyb3d8bbwe\LocalCache\Packages\

**Important: Windows 10** by default hides the “AppData” folder, so you will have to go to “View” in the menu of File Explorer, and select “Hidden items” so as to see it.

#### **For the Custom install:**

If you used a custom location for your Flight Simulator installation, then proceed there.

For example, you may have set:

<E:\Steam\steamapps\common\MicrosoftFlightSimulator\Community>

## **Installing The Working Title GNS 530/430**

The Working Title GNS 530/430 is now in public beta, and downloadable for free from the in-game marketplace. It is recommended that users discontinue use of the PMS50 GNS 530 freeware mod in favor of the WT GNS, which has many more features, and a significantly more realistic display. The WT GNS is expected to become a part of the base simulator soon.

To download and install the Working Title GNS 530/430, click the “MARKETPLACE” tile in the MSFS main menu, and use the search bar to find “GARMIN GNS 430/530” by “Working Title Simulations”. After clicking the “GET AND DOWNLOAD” button, the GPS will be ready to use.

The previously recommended PMS50 GNS 530 modification can still be accessed at:

<https://github.com/pimarc/pms50-gns530/releases>

## **TDS GTNxi 750 Integration**

This aircraft’s GTN 750 unit will automatically detect a valid TDS GTNxi installation and license key, and automatically switch between using the PMS GTN 750 and the TDS GTNxi 750 without any required action by the user.

The TDS GTNxi is available from: <https://www.tdssim.com/tdsgtnxi>

#### **LIMITATIONS:**

MSFS native GPS units and native flight planners will not cross-fill from the GTNxi. This could also be seen as an advantage, allowing simultaneous flight plan loading.

**NOTE:** These are limitations of MSFS and not this aircraft, nor the TDS GTNxi. If and when these issues are resolved, a coordinated effort from the developers of these products will be launched to remove these limitations as soon as possible.

## Accessing the Aircraft

To access the aircraft:

1. Click on 'World Map'.
2. Open the aircraft selection menu by clicking on the aircraft thumbnail in the top left.
3. Use the search feature or scroll through the available aircraft to find the 'Analog Baron'.
4. The Analog Baron is available in two configurations, which appear separately in the aircraft selection menu. They are: Normally Aspirated with no Winglets (same as default G58), and Pressurized with Winglets.
5. After selecting the aircraft, use the 'Liveries' menu to choose your livery.

## Uninstalling

To uninstall this product from your system, use one of the Windows App management features:

**Control Panel -> Programs and Features**

or

**Settings -> Apps -> Apps & features**

Select the product you want to uninstall, choose the 'Uninstall' option and follow the on-screen instructions.

Uninstalling or deleting this product in any other way may cause problems when using this product in the future or with your Windows set-up.

## Updates and Technical Support

For technical support (in English) please visit the Support pages on the Just Flight website. As a Just Flight customer, you can get free technical support for any Just Flight or Just Trains product.

If an update becomes available for this aircraft, we will post details on the Support page and we will also send a notification email about the update to all buyers who are currently subscribed to Just Flight emails.

## Regular News

To get all the latest news about Just Flight products, special offers and projects in development, subscribe to our regular emails.

We can assure you that none of your details will ever be sold or passed on to any third party and you can, of course, unsubscribe from this service at any time.

You can also keep up to date with Just Flight via Facebook and Twitter.

## Liveries & Exterior Mods

Black Square's Analog Baron comes with six complimentary paint colors (Maroon Red, Forest Green, Burnt Orange, and Stone Grey, and Bright Red) in the same scheme as the default aircraft, just to help differentiate the two in menus and screenshots. You may adorn these liveries with whatever tail numbers you wish through the default aircraft configuration menu. You may also add more liveries to the Analog Baron as mod packages the same way you would add them for any other aircraft.

## Compatibility

Since the Black Square Analog Baron makes use of the default Baron's exterior model, all liveries for the default Baron are also compatible with the Analog Baron; however, keep in mind that "livery" mods that change the interior features of the default Baron, such as seats or panel color, will not have an effect on the Analog Baron, since it uses a completely different interior model.

## Example Livery Package

An example addon livery mod exists within the file structure of the Analog Baron in your Community Folder. If you don't know how to locate your MSFS Community Folder, please refer to the installation section of this manual for step-by-step instructions. Once you have located your Community Folder where the Analog Baron is installed, navigate to...

### **bksq-aircraft-analogbaron\SimObjects\Airplanes**

Within the above folder, you will find "**bksq-aircraft-analogbaron-livery-example**". This folder contains everything you need to create a livery mod for the Analog Baron. Inside it, you will find an **aircraft.cfg**, which defines how your livery will appear in the aircraft selection menu, and several other features. There is also the "**TEXTURE.LiveryExample**" folder. Within this folder, you will find only a **texture.cfg** file for now. Continue to the next section for how to implement this file structure to create your own livery mod for the Analog Baron.

## Installation

1. Although liveries for the default Baron are fully compatible with the Analog Baron, each livery must have its own package inside the Community Folder for each aircraft. Luckily, the Analog Baron's livery mod only needs to be a reference to the default livery mod, and none of the textures need to be copied.
2. Begin by creating a new folder in your Community Folder. Name it something like, "**bksq-aircraft-analogbaron-mylivery**". Within this folder, make another folder named "**SimObjects**". Within this folder, make another folder named "**Airplanes**". Within this folder, make yet another folder with the same name as the first,

“**bksq-aircraft-analogbaron-mylivery**”. (We don’t make the rules around here, we just follow them.) Lastly, make yet another folder with the name, “**TEXTURE.mylivery**”, where mylivery matches the unique name you’ve decided to give your livery.

3. Copy the **aircraft.cfg** file from the example livery mod we located above into the SECOND “**bksq-aircraft-analogbaron-mylivery**” folder (it should be the second to last folder you made). Next, copy the **texture.cfg** file from the example livery mod we located above into the **TEXTURE.mylivery** folder (it should be the last folder you made).
4. Open the **aircraft.cfg** file in a text editor, and rename all occurrences of “**Livery Example**” to a name of your choosing for your livery mod. Leave everything else unchanged, unless you know what you’re doing.
5. Open the **texture.cfg** file in a text editor, and follow the instructions to rename the two occurrences of “**LIVERYNAME**” in the file to match the livery for the default Grand Baron that you would like to use with the Analog Baron. The provided example is for a popular livery mod for a popular cargo hauler:

**fallback.2=..\..\Asobo\_Baron\_G58-FEDBEXFEEDER\TEXTURE.FEDBEXFEEDER**

6. Lastly, you will want to copy the two thumbnail images from the livery you wish you use with the Analog Baron into the **TEXTURE.mylivery** folder. They should be named, “**thumbnail.JPG**”, and “**thumbnail\_small.JPG**”. This step is not necessary to use the livery, but helps in identifying it within the aircraft selection menu.
7. Finally, download the MSFS Layout Generator by going to the following link, and clicking the “**MSFSLayoutGenerator.exe**” in the latest release at the top of the page. You may have to expand the “Assets” menu in the top section of the page. Do not download anything labeled “Source Code”.

<https://github.com/HughesMDflyer4/MSFSLayoutGenerator/releases>

8. Once you have moved the Layout Generator to somewhere on your computer, like your desktop, create two final files in the top most directory of your livery mod, in the FIRST **bksq-aircraft-analogbaron-mylivery** folder. The files should be plain text files, created in Windows by right clicking within the empty space in a folder, hovering over “New”, and then clicking, “Text Document”. Rename one of these text files to **layout.json**, and the other to **manifest.json**. Copy the following text from this document and paste it into the **manifest.json** file, replacing “mylivery” with your unique livery name.

```
{
  "dependencies": [],
  "content_type": "LIVERY",
  "title": "aircraft-analogbaron-livery-mylivery",
  "manufacturer": "",
  "creator": "Black Square",
  "package_version": "0.1.0",
  "minimum_game_version": "1.24.2",
```

```

"release_notes": {
  "neutral": {
    "LastUpdate": "",
    "OlderHistory": ""
  }
},
"total_package_size": "00000000000010000000"
}

```

- The final step is dragging your **layout.json** file on top of the “**MSFSLayoutGenerator.exe**” executable. This will run without any graphical interface, and should populate your **layout.json** with content. Take a look in the file to see if there is text, but do not edit anything.

If you have done everything correctly, your file structure should look like this:

- **bksq-aircraft-analogbaron-mylivery**
  - layout.json
  - manifest.json
  - **SimObjects**
    - **Airplanes**
      - **bksq-aircraft-analogbaron-mylivery**
        - aircraft.cfg
        - **TEXTURE.mylivery**
          - texture.cfg
          - thumbnail.JPG
          - thumbnail\_small.JPG

This seems like a lot of work to make a simple reference to an already existing livery mod for another aircraft, but once you have done it once and created the file structure, or once you have copied the structure from someone else’s mod, it will be extremely easy to make as many new Analog Baron liveries as you like.

**Alternatively:** Once a livery mod has been created for the Analog Baron and shared with the community, making your own livery mod should be as easy as pasting in your new textures, changing the aircraft name in aircraft.cfg, and renaming the texture folder in texture.cfg and aircraft.cfg.

# Cockpit & System Guide

## Main Panel

### Annunciator Panel

The Analog Baron's annunciator panel consists of twelve annunciator lamps located on the pilot's side glareshield. From left to right, the lamps indicate the following conditions:

- Landing gear is up when flaps are fully extended or throttle is retarded
- Bus voltage is below 24 VDC
- Left or Right Alternator rectified voltage is below ~26VDC
- Left or Right Cowl Flaps are extended
- Air conditioning condenser door in fully extended (ground) position
- Starter is engaged
- Aft door is unlocked
- Deicing boot manifold is pressurized
- Left or Right pitot probe is receiving current
- Windshield heating pane is receiving current

To test the glareshield annunciator panel, hold the "ANNUN TEST" push button, located to the left of the left engine magneto switches. To the left of the annunciators enumerated above, there are two red LEDs marked, "ENGINE MONITOR ALARM", which will blink when there is an active alarm on the EDM-760 engine monitor. Above the artificial horizon is also an autopilot specific annunciator panel, which indicates active autopilot and flight director modes in a different format than on the face of the KFC 150 autopilot itself, which is sometimes preferential for quick reference. This panel includes a red back-course indicator, and red out-of-trim indicator, which illuminates when the aircraft's pitch is more than ten degrees away from the autopilot command pitch. This panel may be tested by depressing the "TEST" button on the face of the KFC 150. All annunciator lights will automatically dim when the panel lighting master switch is activated.



## True Airspeed Indicator

The Analog Baron's airspeed indicator displays indicated airspeed in knots, reference speeds with colored arcs, and true airspeed on a white tape through the bottom window. The red marking corresponds to the never-exceed speed. The yellow arc corresponds to the clean-air-only speed, where the lower bounds of the arc is the maximum structural cruising speed. The lower end of the green arc corresponds to the clean configuration stalling speed. The upper end of the white arc corresponds to the maximum flap operating speed, and the lower end of the white arc corresponds to the full flap stalling speed. Two additional radial marks are relevant to twin engine aircraft operation. The red line indicates  $V_{mc}$ , or minimum controllable speed with a single engine operating, and the critical engine inoperative. The blue line indicates the best single engine operating climb speed. A small white triangle indicates the maximum landing gear extension airspeed, and maximum approach flap setting airspeed. The airspeed indicator also includes a true airspeed calculator, which can be positioned for pressure altitude and air temperature, much like an E6B flight computer, to produce the true airspeed indicated in the bottom window.





## Bendix/King KI 256 Vacuum Artificial Horizon

A vacuum powered artificial horizon with illuminated decision height indicator, and adjustable attitude bars. Attitude bars are adjusted with the small screw adjustment on the bottom right of the unit's face. When paired with a KFC autopilot, the KI 256 is also capable of driving integrated attitude command bars via the autopilot's flight director output. The command bars will automatically compensate for the adjusted position of the static attitude bar, and will be hidden from view when not in use.



## Bendix/King KEA 130A Altimeter

A three pointer precision, encoding altimeter, certified for flight up to 25,000 feet pressure altitude. Kollsman setting is adjusted via the knob in the bottom left corner of the unit. The pilot's altimeter is the encoding altimeter used for the Mode-C transponder output, and to drive the altitude hold function of the KFC 150 autopilot.



## Bendix/King KI 229 Radio Magnetic Indicator (RMI)

This RMI has an automatically rotating compass card that is driven via the aircraft's remote compass, and therefore, has no adjustment knob like an ADF. The solid yellow needle of the RMI is permanently driven by the NAV1 VOR navigation source, the same as the HSI source. The hollow green needle of the RMI is permanently driven by the KR 87 ADF receiver. Both needles will point directly to the tuned radio ground station whenever signal strength is sufficient. Since there are no flags on this unit to indicate reception, it is necessary to properly identify the station via its morse code identifier before using the RMI indications as a source of navigation. The RMI will show a red flag when the unit is not receiving power, or the unit is not receiving signal from the remote compass.



## Bendix/King KI 525A Horizontal Situation Indicator (HSI)

The KI 525A HSI has an automatically controlled compass card, as opposed to most directional gyroscopic compass units, which can be automatically slaved to magnetic heading, or manually controlled via the remote compass controller. The HSI has two knobs for controlling the heading bug for visual reference, and for autopilot heading lateral navigation mode, and a knob for adjusting the course indicated with the yellow needle in the center of the display. The split yellow needle acts as a course deviation indicator, where the deviation scale depends on the navigation source, and operational mode, such as enroute GPS, or ILS antenna signal. On either side of the unit are normally hidden, yellow, glideslope indicator needles, which come into view when the glideslope signal is valid. Under the yellow course indicating needle, two windows with white indicators show the traditional to/from VOR indication when a VOR radio source is selected. When no navigation source has a valid signal, a red “NAV” flag appears at the top of the display. When no valid signal is received from the remote compass, a red “HDG” flag appears at the top of the display. When the unit is not receiving power, both flags are visible. The HSI in this aircraft can be controlled by either the NAV1 source, or the RNAV source, by selecting with the switch located below the KDI 572R DME display unit.

NOTE: Unfortunately, it is not possible to drive the stock MSFS autopilot system with a custom navigation source without implementing a whole new autopilot (to the best of my knowledge). It is recommended that you simply steer the autopilot via the heading bug with reference to the RNAV course deviation shown on the CDI.



## Vertical Speed Indicator

A vertical speed indicator displaying a maximum of +/- 4,000 feet per minute.



## Bendix/King KI 206 Localizer

The KI 206 Localizer acts as a secondary radionavigation source in this aircraft, being permanently driven by the NAV2 VOR radio source. The KI 206 includes both lateral and vertical guidance needles, which can be driven from either a VOR/ILS receiver, or via the GNS 430W. The unit incorporates both vertical “GS”, and horizontal “NAV” red flags to indicate when the unit has power, and when the respective navigation source is being received. Two windows with white indicators show the traditional to/from VOR indication when a VOR radio source is selected. This unit is not connected to the remote compass, and therefore, must be manually adjusted for the desired course with the omni-bearing-selector (OBS) knob on the unit’s face.



## Mid-Continent Turn Coordinator

A DC electric turn coordinator with indicator markings for a standard rate 2-minute turn, a traditional slip indicator, and a red power flag to indicate when the unit is not receiving power.



## Bendix/King KRA-10 Radar Altimeter

The KRA-10 Radar Altimeter displays the height of the belly-mounted radar transducer with respect to the terrain below the aircraft. The yellow indicating needle rests in a vertical “OFF” position when the unit is not receiving power, a valid signal, or when the indicated altitude is below 10 feet. An orange decision height bug can be positioned from 0 to 2,500 feet on the indicating scale with the adjustment knob. When passing the decision height in a descent, the integrated, yellow, decision height indicator will illuminate, as well as the connected indicator on the KI 256 attitude indicator. Be aware that the indicating scale is non-linear.





## Engine Instrumentation & Fuel Quantity Indicators

A column of five round-dial engine instruments in the main panel are used to monitor the health of the powerplant. From top to bottom, the gauges are Manifold Pressure (inHg), Propeller RPM (RPM x 100), Fuel Flow (gal/hr), Cylinder Head Temperature (CHT °C), Exhaust Gas Temperature (EGT 20°C/Div.), Oil Temperature (°C), and Oil Pressure (PSI). Some of these instruments are passively driven from the accessory gearbox on the engine, while others are electrically driven; therefore, some will remain functioning with a total loss of electrical power.



The pressurized version of this aircraft is equipped with different engines than the normally aspirated version, as well as turbochargers. The turbocharged engines are capable of operating at wide-open throttle manifold pressures of up to 39.5 inHg, and fuel flows that may approach 40 GPH.



Under the engine instrumentation, there are two fuel quantity indicators on the subpanel behind the throttle quadrant. The fuel indicators are marked in fractions, not gallons. Each fuel tank has a capacity of 86 U.S. Gallons, with 83 gal usable. Takeoff is not permitted when either fuel quantity is within the marked yellow arc at the 1/4th level, or approximately 20 gallons.



NOTE: Conventional fuel sender units in aircraft are notoriously sensitive to lateral G-force, and how level the aircraft is sitting on the ground. The fuel quantity gauges may appear to indicate incorrectly, as a result, though this is accurate to the real aircraft. Given that this aircraft is also capable of random fuel leaks, fuel levels should be checked prior to takeoff, just as in the real aircraft, when any potential discrepancy exists.

## Duplicate Copilot Instrumentation

Three primary flight instruments are included on the co-pilot's side of the aircraft: an airspeed indicator, artificial horizon, and altimeter.



## Avionics

Black Square aircraft have reconfigurable radio panels that allow you to fly with many popular radio configurations from old-school no GPS panels, to modern installations with touchscreen GPS navigators. To adjust which configuration you're flying with, use the knobs or switches on the right-hand side of the main panel, adjacent to the co-pilot's yoke bearing to select your preferred radio for Com1/Nav1, and Com2/Nav2. It might be easier to hide the co-pilot's yoke while making these selections. The radio selection will be automatically saved and reloaded at the start of a new flight.



## Garmin GMA 340 Audio Panel

This audio controller is very common in light aircraft, and allows for the control of both receiving and transmitting audio sources on one panel. In addition, this implementation also supports listening to multiple VHF communication sources at once, and transmitting on both Com1 and Com2 by pressing the "COM 1/2" button. When you want to return to normal operation, press one of the "COM MIC" keys, and the integrated "COM 1/2" button indicator should extinguish.



## KMA 24 Audio Panel

This audio controller is common in older light aircraft, and allows for the control of receiving and transmitting audio sources, and cabin speaker sources. The transmitting channel may be selected with the rotary selector knob on the right of the unit, from the following options: Unit off (OFF), Radiotelephone (TEL), COM 1, COM 2, Cabin Interphone (INT), and External Interphone (EXT). The unit possesses two rows of toggling push button selector switches to choose audio receiving sources. The top row is used to select an unlimited number of simultaneous audio sources for the cabin speaker, while the bottom row selects sources for the headphone circuit. Only the bottom row has an effect on the audio source within the simulation.



## Garmin GTN 750 (Com1)

This modern touchscreen GPS is implemented by a 3rd party developer. For installation instructions, and instructions on its use, see the installation section of this manual, or the developer's website. **Both PMS GTN 750 and TDS GTNxi 750 products are supported.** The aircraft will automatically switch between the installed software with no required user action.



## Garmin GNS 530/430 (Com1/Com2)

This 2000's era full-color GPS is mostly or partially implemented by a 3rd party developer. For installation instructions, and instructions on its use, see the installation section of this manual, or the developer's website.

NOTE: To hear an audible radio station identifier, both the small adjustment knob on the GNS must be pressed, and the appropriate NAV receiver indicator light must be illuminated on the GMA 340 Audio panel.



## Bendix/King KX-155B (Com1/Com2)

This 1990's era Com/Nav receiver allows you to control audio and navigation source inputs from two independent communication and navigation antennas, the left side controlling the VHF Com radio, and the right controlling the VHF Nav radio. Frequency tuning increments can be toggled by pulling on the inner knob of the COM side (labeled "PULL 25K"). The small adjustment knob on the Com side of the unit controls receiver volume, and can be pulled to toggle between US and European frequency spacing. The smallest tunable increment in US mode is 25 kHz, and the smallest possible increment in European mode is 8.33 kHz. The COM display will show frequencies with three decimal places when in 8.33 kHz mode, and two decimal places in 25 kHz mode. When the inner frequency adjustment knob on the NAV side is pulled, the same frequency adjustment knob will tune the active NAV frequency, and the standby frequency will be flagged with dashes. Additionally, a small "T" symbol will be displayed between the active and standby COM frequencies whenever the radio is transmitting. The small adjustment knob on the Nav side of the unit controls Nav receiver identifier volume, and can be pulled for an audible identifier tone.

NOTE: To hear an audible radio station identifier, both the small, right adjustment knob on the KX155 must be pulled out, and the appropriate NAV receiver indicator light must be illuminated on the GMA 340 Audio panel.



## Bendix/King KNS-81 RNAV Navigation System

See the standalone section of this manual for instructions on using the KNS-81, below. All stored frequencies, radials, and offsets associated with this unit will be automatically saved and recalled at the beginning of a new flight.

## Bendix/King KR 87 ADF

The KR 87 ADF receiver allows for standby ADF frequencies to be selected with the dual concentric rotary knobs on the right of the unit. When tuning a frequency, you will be editing the standby frequency, which can be swapped into the active frequency by pressing the “FRQ <->” push button. The two push buttons to the right of the “FRQ <->” button are for controlling the integrated flight timer. The “FLT/ET” push button toggles between the flight duration timer, which is automatically started when power is applied, and the elapsed time timer, which is started, stopped, and reset with the “SET/RST” push button. On the left of the unit, the “ADF” push button toggles the ADF receiver’s antenna mode between normal operation, and listening to the sense-only antenna (disabling the loop antenna), which makes receiving audio-only transmissions easier in low signal strength conditions. Lastly, the “BFO” push button toggles the unit’s beat frequency oscillator, which is used to listen to the tuned station’s morse code identifier in low signal strength conditions.



## Bendix/King KDI 572R DME

This implementation of a KDI 572 behaves similarly to any other Distance Measuring Equipment (DME) receiver, displaying a nautical mile distance to the selected and tuned station, the current speed of the aircraft relative to the selected and tuned station, and a time-to-go until over the station. It should be noted that, like all other DME displays, this one is similarly dependent on being within the VOR service volume, and having good line-of-sight reception of the station. It should also be noted that these distances, speeds, and times, are based on slant-range to the station, not distance along the ground, as one would draw on a map. In order to receive DME information on the KDI 572, the station must be tuned in one of the two navigation radios, the station must be equipped with DME transmitting equipment, the station must have adequate signal strength, and the KDI 572 must have the appropriate navigation source selected via the selector knob mounted on its face. Selecting “HLD” mode will hold the current DME frequency and information on the unit, while allowing the user to change the tuned NAV frequencies on the NAV1 or NAV2 radios. This can be useful for some specific instrument approaches. This unit’s state will be automatically saved and reloaded at the start of the next flight.

The “R” designation of this unit is of fictional nature to indicate that it possesses an additional switch position for viewing RNAV DME information from the KNS-81. When the rotary selector switch is placed in the RNAV position, “RNV” will annunciate to the right of the distance information. In normal operation, the unit will display DME information from the KNS-81, just like any other DME source. When the “RAD” two-position button is depressed on the KNS-81, however, the time (MIN) field will read “F”, for “From”, to indicate that the speed field (KT) is

displaying the radial FROM the waypoint or VOR upon which the aircraft currently sits. When in radial mode, the “KT” and “MIN” annunciators will not be illuminated.



## Bendix/King KFC 150 Autopilot

The KFC 150 is a relatively simple autopilot, with standard modes of control, which resemble the operation of the default KAP 140 autopilot that many users may be more familiar with. The unit has an autopilot master push button, and can be disabled via the yoke-mounted autopilot disconnect push buttons. Along the row of push buttons, the autopilot’s mode selections include, flight director, altitude hold mode, heading hold mode, lateral navigation mode, approach coupling mode, and back course mode. A test button is included on the face of the unit to test the autopilot annunciators, and perform a self-test of the KFC unit. When in altitude hold mode, an “UP DN” rocker switch located on the left of the unit is used to adjust the selected altitude by increments of 100 feet. Alternatively, when in pitch hold mode, the same rocker switch can be used to increase or decrease the pitch holding reference by increments of one degree. The KFC 150 is designed to be used with the KAS 297B altitude and vertical speed selector.

The flight director on the KI 256 attitude indicator can be activated and deactivated via the “FD” button on the KFC 150. The flight director can also be deactivated via the red autopilot disconnect buttons on either yoke. In the real aircraft, this push button has two stages of activation. For your convenience, this feature is approximated with two presses of the button. The first press will deactivate only the autopilot master, allowing the user to hand-fly the aircraft. The flight director and relevant modes will remain engaged. Upon pressing the disconnect button a second time, the flight director will also be disengaged. When the autopilot master is disengaged after the first press, all autopilot modes can still be selected on the KFC 150, which will apply to the command bars, just as if the autopilot was still flying the aircraft itself.





## Bendix/King KAS 297B Altitude Selector

The KAS 297B resides on the main instrument panel, above the pilot's altimeter. The altitude selector is an integral part of the Analog Baron's autopilot system, allowing the pilot to select target and alert altitudes, as well as vertical speeds. The unit's dual concentric rotary encoder can be used to select target and alert altitudes by default, and can be used to select vertical speeds when the inner knob is pulled out. The outer knob will adjust both quantities in 1,000 ft/(min) increments, and the inner knob will adjust both quantities in 100 ft/(min) increments. When the knob is pulled, "FT/MIN" will illuminate on the display, as opposed to just "FT" when in altitude selection mode. When adjusting vertical speed, two small arrows to the left of the set rate indicate whether the desired vertical speed is a climb or a descent. Pressing the "VS ENG" push button will engage vertical speed hold mode, either maintaining the aircraft's current vertical speed, or attempting to achieve one that has been set in the KAS 297B. Pressing the "ALT ARM" button will engage vertical speed mode and attempt to capture the altitude set in the KAS 297B. When the autopilot is transitioning between vertical speed hold mode and altitude hold mode to capture the desired altitude, "CAPT" will illuminate on the display. When approaching the desired altitude within 1,000 feet, or departing the set altitude beyond 300 feet, "ALERT" will illuminate on the display, and an audible tone will be heard. Pressing the altitude hold mode button on the KFC 150 will cancel any currently set altitudes in the KAS 297B, insert the current barometric altitude, and begin to level the aircraft to hold the shown altitude.




## JPI EDM-760 Engine Monitor

This engine monitor is a powerful tool for monitoring and managing a high performance aircraft engine, and should be used to its fullest potential to prevent engine damage, increase mechanical longevity, and provide the most efficient cruise flight. See the standalone section of this manual for instructions on using the EDM-760, below.

## Bendix RDR 1150XL Color Weather Radar

This implementation of the Bendix RDR 1150XL has six selectable modes via the mode select knob in the upper right-hand corner of the unit. When cycled through the “OFF” mode, the unit will perform a self-test upon startup, and will annunciate if signal is not received from the aircraft’s external weather radar transceiver unit. In “STBY” mode, the unit is in a safe standby mode, which does not energize the radar transmitter. It is recommended that the unit be placed in standby mode whenever the aircraft is operating on the ground to avoid injuring ground personnel, or sensitive equipment on other nearby aircraft. In this mode, the unit will annunciate “STAND BY” in yellow in the center of the radar arc. In “TST” mode, the unit will continuously display a sweeping test signal from the radar unit, which should subtend the full horizontal radar arc, and contain concentric arcs of magenta, red, yellow and green. The “RT FAILURE” flag will also display in cyan. The “ON” mode is the normal mode of operation for this unit. In “ON” mode, the radar will display precipitation and severe turbulence in the above color spectrum, within the radar arc on the screen. The range of the display can be adjusted with the “RNG ^”, and the “RNG v” push buttons. Nautical mile distances are displayed adjacent to the range rings on the radar display. By pressing the “VP” button, the unit can be toggled between horizontal and vertical profile modes, which are annunciated in the upper left-hand corner of the display. The “<TK” and “TK>” buttons can be used to pan the radar transceiver to the right or left, and the “TILT” knob can be used to tilt the radar transceiver up or down. The position of the radar transceiver is annunciated on the display in yellow, but there is no effect on the underlying weather radar simulation. Lastly, “BRT”, and “GAIN” knobs on the left of the unit can be used to control the brightness and gain of the radar respectively. “NAV” and “LOG” modes are not implemented yet in this unit. This unit’s state will be saved automatically and reloaded.

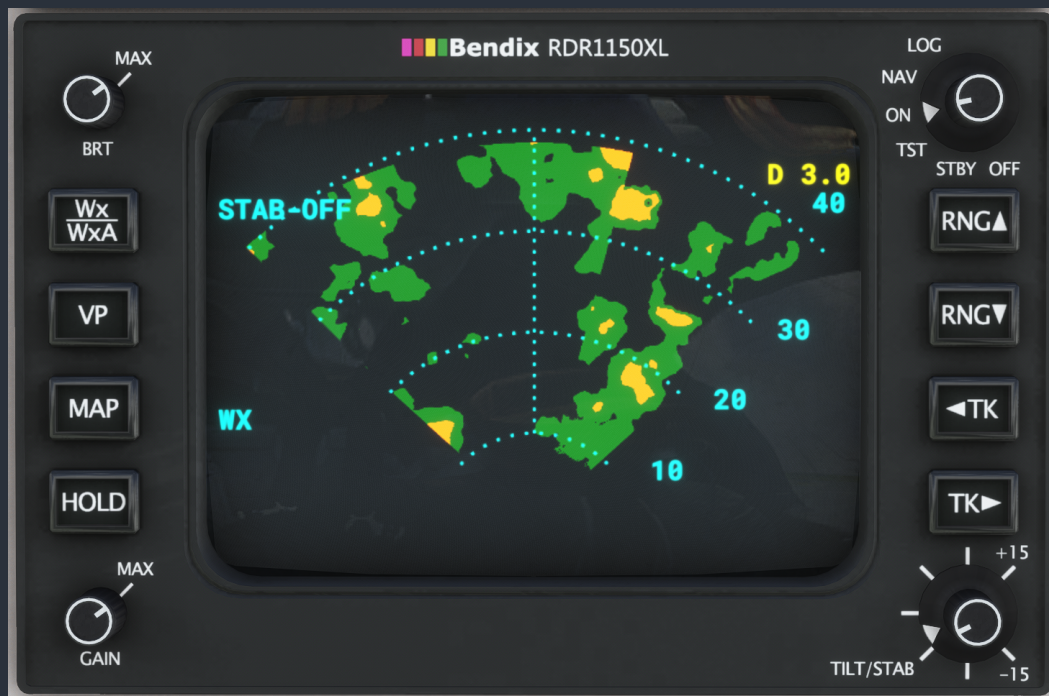

## Garmin GTX 327 Transponder

The GTX 327 transponder supports the typical transponder modes of operation; off, standby, on, and altitude reporting mode. This transponder also has a VFR preset button, which will automatically set the transponder code to your region's VFR flight code (such as 1200 in the United States). The unit is also equipped with an ident button for responding to ident requests from air traffic control. Pressing the "FUNC" button will cycle through the unit's function modes, which are as follows:

1. Pressure Altitude (in flight levels)
2. Flight Timer (triggered by weight-on-wheels sensor)
3. Outside Air Temperature & Density Altitude
4. Count Up Timer
5. Count Down Timer

Timers can started and stopped by pressing the "START/STOP" button, and the time can be cleared/reset with the "CLR" button.




## Electrical/Miscellaneous

### Circuit Breakers

The Analog Baron's circuit breaker panels are located on the cockpit sidewall to the left of the pilot's seat, and under the copilot's subpanel. The latter of the two panels resides on a separate avionics electrical bus. Breakers may be pulled or pushed to disable electrical circuits and bus connections within the aircraft. All the corresponding electrical circuits are modeled. The status of the electrical system may be monitored via the volt and amp meters discussed below. In an emergency situation, such as the detection of smoke, acrid burning smells, loss of engine, or alternator failure, all non-essential electrical systems should be switched off, workload permitting. The last circuit breaker to the right on the avionics panel is a relay that connects the avionics bus to the aircraft's main electrical bus.

### Voltmeter & Ammeters

Under the fuel quantity gauges on the center subpanel, two meters with vertical scales indicate the total load on the aircraft's two alternators. Another meter with a horizontal scale indicates the bus voltage. The ammeters indicate current (in percent of maximum) being supplied by each alternator. The voltmeter indicates the voltage of the aircraft's main bus from 0V to 30V.

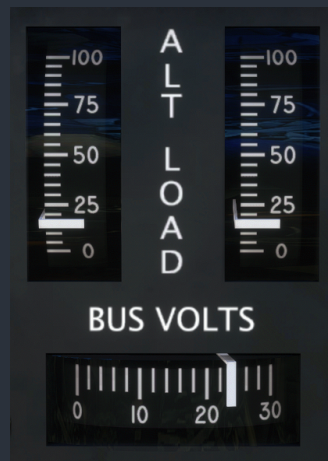

### Bendix/King KA 51B Remote Compass Synchronoscope

This aircraft contains a Bendix/King remote compass, and remote compass controller with integrated synchronoscope. The purpose of a remote compass is to supply several instruments, autopilots, or navigation systems with a reliable source of magnetic compass direction that is continuously correcting for gyroscopic drift. This is accomplished by integrating a fluxgate magnetometer's sensing of magnetic direction with a larger gyroscope than could fit within the housing of a single panel-mounted instrument. This remote compass erects to the correct magnetic heading when powered on, and will automatically correct for gyroscopic drift throughout the flight when the remote compass controller's mode switch is placed in the "SLAVE" position. In this mode, the integrated synchronoscope should display a white line,

centered between the stationary + and - markings. Should the position of the remote compass become unreliable, such as during flight through magnetic disturbances or over the earth's poles, the remote compass can be placed in a manual mode by placing the mode switch in the "FREE" position. In this mode, the input of the magnetometer will be ignored, and the unit will behave like a normal directional gyroscope. The position of the remote compass can be advanced in one direction or another by holding the remaining switch on the remote compass control in either the clockwise ("CW") direction, or the counter-clockwise ("CCW") direction. In this mode, the synchroscope will show the set compass position's deviation from the detected magnetic heading.



## Propeller Synchrophaser

Since the Analog Baron is equipped with a propeller synchronizer, it is also equipped with a visual synchrophaser on the main panel. The synchrophaser is a small disk with alternating black and white wedge marks. When one propeller is spinning faster than the other, the disk will rotate in the direction of that propeller; counterclockwise for the left engine, and clockwise for the right engine.




## Propeller Amps Indicator

The propeller ammeter gauge indicates the flow of current to the propeller hubs during deicing. Nominal current when cycling is 20-25 amps.



## Deicing Boot Pressure Indicator

Deicing pressure for the aircraft's inflatable deicing boots is supplied by a mechanical instrument air pump on each engine. This is the same air source used to power the gyroscopic flight instruments, and the standby door seal system in the pressurized model. This gauge indicates the pressure in PSI being admitted to the deicing boots, and will cycle as the automatic deicing boot controller cycles the pressurized air to the different zones of the aircraft. The pressure will be a few PSI less when operating the deicing boots in manual mode, as this activates all deicing zones at once. The pressure will be further reduced while the standby door seal valve is open.

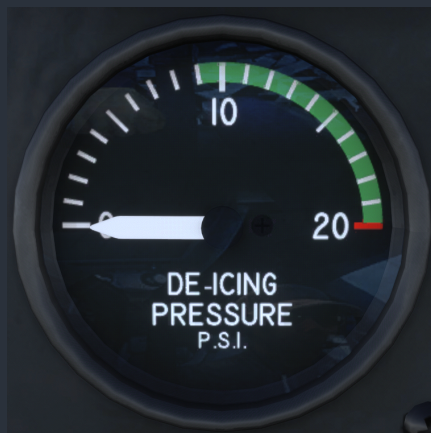


## Instrument Air Indicator

The instrument air indicator shows the regulated air pressure generated by the two engine-driven air pumps. The scale on the gauge indicates the acceptable pressure range through the aircraft's cruising altitudes. At sea level, the vacuum suction should be near the top of the green arc, above 5 inHg. Since dual engine failure in a twin engine aircraft is very unlikely, there is no additional electric standby instrument air pump. At the bottom of the gauge, there are two red incandescent indicator bulbs to indicate when a source of instrument air has become inoperable. These indications should be checked during engine starting.



## Oxygen Pressure Gauge

On the copilot's subpanel in the normally aspirated version of this aircraft, a gauge indicates the oxygen pressure available in the onboard, refillable oxygen cylinder. This cylinder is normally pressurized to 1,850 - 2,150 PSI when serviced on the ground. Oxygen pressure will deplete as it is consumed by passengers and crew, when activated. To activate the built-in demand-type oxygen regulators for all occupants, pull the green oxygen supply handle on the pilot's subpanel out to the on position. Oxygen will be consumed by the occupants only in accordance with the current pressure altitude of the aircraft, and the weights of the crew members. The oxygen pressure is saved between flights, and can be refilled via the "SYSTEMS" page on the weather radar. When the cabin oxygen system is activated, the sound of pressurized gas flowing through pipes will be audible.

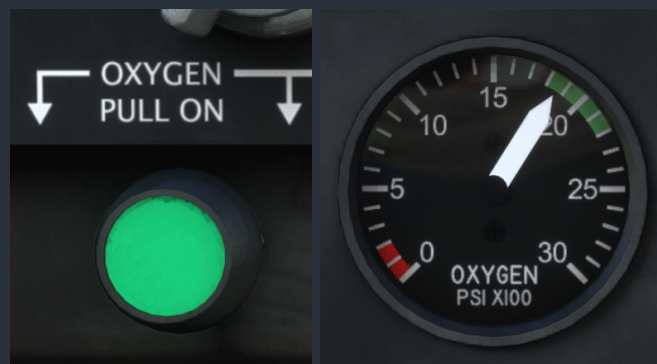

## Yoke-Mounted Digital Chronometers

On each yoke, there is a digital chronometer capable of displaying two different clock modes, and one timer mode, cycled through with the “SELECT” push button. The two clock modes are Universal Time (“UT”), and Local Time (“LT”), each in 24-hour format. The Elapsed Time (“ET”) mode is a count-up stopwatch, controlled via the “CONTROL” push button. The maximum displayable time in Elapsed Time mode is 99 minutes and 59 seconds. The mode of these chronometers will be automatically saved and restored at the beginning of a new flight.



## Hobbs Timer & Carbon Monoxide Detector

The included Hobbs timer in the aircraft runs from when the master switch is activated, to when it is shut off. Indicated in tenths of an hour, this meter should be a reliable source of timing for your logbook recordings, or emergency leg timing in IMC, should you find yourself in a really unusual and dire situation.

Adjacent to the hobbs timer is a carbon monoxide detector. Carbon monoxide is a potentially deadly gas that results from the combustion of hydrocarbons, such as in an aircraft’s internal combustion engine. The gas is odorless, and colorless, making it extremely difficult to detect. To test this carbon monoxide detector, depress the “TEST/RESET” button on the unit. Both the amber and green “ALERT” and “STATUS” lights should illuminate. The detector is battery operated, and the green status light should blink once every few seconds to indicate that the unit is functioning properly. The detector can both fail, and detect an exhaust gas leak via the integrated failures system. If carbon monoxide is detected, a warning tone will sound, and action should be taken immediately.





## Cabin Pressurization System



The cabin pressurization is controlled via several switches and push-buttons on the co-pilots subpanel, and a dial behind the throttle quadrant. The selector dial consists of two offset control knobs. The small knob at the bottom left controls the cabin climb/descent rate from between approximately 150 ft/min to 2,000 ft/min. A position approximately one third of the knob's full rotation from the counterclockwise stop should produce a desirable climb rate of around 700 ft/min. The larger, centrally located knob controls the destination cabin altitude by rotating a scale visible through the plastic window above the knob. The upper scale of this rotating card (labeled "CABIN") is used to set the desired cabin altitude from -1,000 ft to 15,000 ft. The lower scale (labeled "ACFT") rotates with the upper scale and depicts the approximate aircraft pressure altitude at which the pressurization controller will no longer be able to maintain the desired cabin pressure. For example, when the upper scale is set to 8,000 ft at the small black index mark on the plastic window, the inner scale will read approximately 19,900 ft at the same black index mark. This means that the pressurization controller will be able to maintain a cabin pressure equivalent to 8,000 feet pressure altitude until the aircraft reaches 19,900 feet pressure altitude. If the aircraft continues climbing without an adjustment being made to the pressurization controller, the cabin altitude will begin climbing beyond the desired 8,000 feet. If the cabin pressure differential becomes negative, or increases beyond 3.9psi, the electric dump valve will activate, rapidly dropping the pressure differential. The electric dump valve can be disabled by pulling the "CABIN PRESS" circuit breaker.

To the right of the cabin pressurization controller dial are two push-buttons, and two toggle switches relating to cabin pressurization control. The top toggle switch has two positions, "PRESS" and "DUMP". When cabin pressurization is desired, this switch should be placed in the "PRESS" position. Cabin pressure should always be dumped using this switch after landing, and before opening cabin doors, or cockpit windows. Pressing the colocated "TEST" button will bypass the weight-on-wheels sensor, allowing the cabin to pressurize while on the ground, which is required for the pressurization ground checks.



Below, another two-position toggle switch, labeled “PRESS”, activates the aircraft’s inflatable door seals, which are required for pressurized operation. In the event of a primary door seal pressurization failure (indicated by the red “DOOR SEAL” glareshield annunciator), the door seals may also be pressurized by either instrument air source supplied by the engines. To pressurize the door seals in the event of a primary failure, leave the door seal mode switch in the “PRESS” position, and pull the “door seal standby system” lever on the pilot’s subpanel away from the instrument panel. Press and HOLD the red “STANDBY” push-button on the door seal panel to momentarily inflate the door seals. If the “DOOR SEAL” glareshield annunciator extinguishes, the standby system has successfully inflated the door seals to an acceptable pressure (around 16 PSI). If high altitude flight is continued, the door seal annunciator light will illuminate again as pressure is slowly lost in the door seal system. Press the momentary push-button again to reinflate the door seals, and consider descending to an altitude that does not require pressurization as soon as practical.

NOTE: The pressurization of the door seals will also reduce cabin wind noise. The audible change in sound levels can be used as a secondary indicator of the door seal pressure.

Three additional glareshield annunciators are included in the pressurized version of the Analog Baron. One is the aforementioned “DOOR SEAL” annunciator, which indicates when a failure is detected in the primary door seal pressurization controller loop. An amber “CABIN ALT” annunciator indicates when the cabin is at pressure altitudes in excess of approximately 11,500 ft. Lastly, a red “CABIN DIFF” annunciator indicates when an exceedance of the 3.9 PSI maximum cabin differential pressure is imminent.



At the bottom of the pilot's subpanel, to the left of the door seal standby air valve lever, are two pull handles labeled "CABIN PRESS AIR SHUTOFF". Unlike the normally aspirated version of this aircraft, which derives no breathing air from either engine, the pressurization system uses regulated air from each turbocharger to pressurize the cabin. In the event of a fire, carbon monoxide leak, or other hazardous condition, it may become necessary to isolate an engine from the breathable air in the cabin by pulling these handles away from the instrument panel. They can also be used to test the pressurization supply air of each engine during the ground pressurization test, to ensure that both are working properly.

NOTE: As the Analog Baron's pressurization system derives its pressurized air from the aircraft's two turbochargers, the maximum attainable inflow pressurization is dependent on turbocharger RPM, just as is the intake manifold pressure. If the throttles are reduced while operating at very high pressure altitudes, turbocharger RPM may no longer be sufficient to sustain cabin pressurization. Check valves will prevent the rapid depressurization of the cabin, but leaks in the system will allow pressurized air to escape that cannot be replaced. This will likely be accompanied by a more severe than expected reduction in engine performance for the amount of throttle adjustment. For more information on managing turbochargers during high altitude operation, see the turbocharger operation section of this manual.

## Low Thrust Detector

This aircraft is equipped with a now-rarely known system to aid in the identification of a failed engine during emergency procedures, or anticipate the incipient failure of a functioning engine. The low thrust detector system consists of two curved pitot tubes mounted in the propeller wash of each engine, a digital signal processing microcomputer, and several indicator LED's. When the thrust being produced by one engine falls slightly below the other, an amber LED will illuminate on the main instrument panel above the engine instrumentation to indicate that an engine failure or partial power loss may be imminent on the low thrust side. The low thrust detector is capable of detecting small variations in thrust, so false positive indications of partial engine failure can be expected during aggressive leaning. When the thrust of an engine falls significantly below the other, a blinking red LED will illuminate to indicate a complete engine failure. Users familiar with engine-out emergency procedures will immediately see the utility of this system, and the enhanced safety it offers by mitigating the chances of incorrectly identifying the failed engine.



## Lighting Controls

### Cabin Lighting

Cabin reading lights for each seating position can be turned on and off via the overhead push buttons over each seat. Ensure that cabin lighting is turned off during all flight and ground operations, as light bleeds from the cabin into the cockpit area, diminishing the quality of crew night vision. Keep in mind that incandescent, DC, cabin lighting presents a significant drain on the aircraft battery during operation. Use of cabin lighting should be kept to a minimum when the aircraft battery is the only source of electrical power.

### Panel Lighting

Panel lighting is controlled by two toggle switches on the pilot's subpanel, "FLOOD" and "FLOOD", and four rheostats on the copilot's subpanel. The "FLOOD" switch corresponds to the "INST FLOOD" rheostat, and controls the blue-green indirect glareshield lighting. The "FLOOD" switch corresponds to the other three panel lighting rheostats. The "FLIGHT INST" rheostat controls the intensity of the flight instruments' integrated lighting, or panel-mounted lighting stems for all flight instruments. The "ENG INST AVIONICS" rheostat controls the intensity of the engine instruments' integrated lighting, and the integrity lighting of the aircraft's avionics. Lastly, the "SUBPANEL LIGHTING" rheostat controls the intensity of the panel's electroluminescent integrity lighting. In order for a lighting system to be illuminated, its associated switch must be in the on position, and its rheostat turned clockwise to the desired lighting intensity.

### Cockpit Lighting

In addition to the overhead cabin lighting, each yoke possesses a "MAP OAT COMPASS" toggling push button of similar style to the overhead cabin light switches. On the pilot's yoke, this button will control three lights: a stem light to illuminate the outside air temperature gauge, integrated lighting in the magnetic compass, and a map reading light on the underside of the yoke, which is focused at the pilot's knees. On the copilot side, this switch will only control the yoke-mounted reading light.



## State Saving

This aircraft implements “selective” state saving, meaning that not all variables are saved and recalled at the next session, but some important settings are, primarily to enhance the user experience. Of primary interest, the radio configuration is saved, as well as any preset frequencies/distances/radials/etc that are entered into radio memory. Many radio and switch settings are also saved for recall, including cabin environmental controls, and the state of other cabin aesthetics, such as sun visors, armrests, and windows. No action is required by the user to save these configurations, as they are autosaved periodically, or whenever required by the software. The state of switches that affect the primary operation of the aircraft, such as battery switches, de-icing, etc, are not saved, and are instead set when the aircraft is loaded based on the starting position of the aircraft. Engine health and oxygen pressure are saved between flights, and can be reset via the “SYSTEMS” screen on the Weather Radar.

Note: Since this aircraft uses the native MSFS state saving library, your changes will only be saved if the simulator is shut down correctly via the “Quit to Desktop” button in the main menu.

## Environmental Simulation & Controls

This aircraft is equipped with a simulated environmental control system, allowing the user to learn the essentials of passenger comfort while operating this aircraft. Cabin temperature is calculated distinctly from outside air temperature. Since the walls of the aircraft are insulated, it will take time for the cabin temperature of the aircraft to equalize with the outside air temperature. The cabin will also heat itself beyond the outside air temperature during warm sunny conditions, and slowly equalize with the outside air temperature after sunset. Without the need for any aircraft power, the cabin temperature can be partially equalized with the outside air temperature by opening the pilot’s side storm window, and fully equalized by ram air cooling, so long as the airspeed of the aircraft is great enough. Cabin temperature can also be equalized with the use of the electric vent blower centrifugal fan mounted in the tail of the aircraft. The rate at which temperature equalization, active heating, or active cooling can be achieved can be increased by placing the “VENT BLOWER” switch in the on position, by turning the “A/C BLOWER” switch in either the “LO” or “HI” positions when the air conditioning is on, by turning the “HEATER BLOWER” switch in either the “LO” or “HI” positions when the combustion heater is running, or by opening the cabin vents. The forward cabin vents are opened by rotating the metal “FRESH AIR” knob on the overhead panel in the counterclockwise direction. The rear cabin air vents can be opened by moving the “CABIN AIR” slider knob under the circuit breaker panel to the forward position. The Analog Baron has an additional air vent control knob under the copilot’s panel for just copilot air, which is not present in the Analog Bonanza. Be aware that the electric ventilation systems increase the load required from the current power source substantially, and therefore should be used predominantly while under power, or when external power is supplied to the power distribution bus.

## Cabin Temperature Monitoring

A temperature monitoring system is available in this aircraft to monitor cabin temperature, and alert the pilot to when cabin temperatures have become unacceptably hot or cold. The digital LCD temperature display, to the right of the EDM-760 engine monitor, will display temperatures from -99° to 999° Celsius, or Fahrenheit, toggleable with the small blue push button.

Backlighting for this instrument is dimmed via the “ENG INST AVIONICS” light dimmer, along with the other avionics backlighting. In addition to this LCD display, two small LED’s are located to the left of the pilot’s airspeed indicator to indicate when cabin temperatures are unacceptably hot or cold within the pilot’s primary field of view, and call their attention to the cabin temperature settings. The “CABIN TEMP LOW” light illuminates when cabin temperatures are below approximately 50°F, or 10°C. The “CABIN TEMP HIGH” light illuminates when cabin temperatures are above approximately 90°F, or 32°C.




## Cabin Environmental Controls

Unlike more complex aircraft with automatic environmental control systems, heating and cooling of the Analog Baron is accomplished via a balancing act between heating and cooling sources. On a mild day, simply equalizing the cabin temperature with the outside air temperature with any of the methods listed above may be enough to keep the cabin at a comfortable temperature. On warmer days, use of the air conditioner will be necessary. Placing the air conditioning control switch in the “A/C” position will not begin cooling the cabin by itself. The “A/C BLOWER” switch must also be placed in the “HI” or “LO” position, the left engine must be running, and the air conditioning condenser must be deployed. From here, opening and closing the cabin vents to varying degrees can be used to maintain the desired temperature. The air conditioning blower will automatically turn off when the landing gear is retracted.

The cabin is heated via a combustion heater in the aircraft’s nose, and funneled to the cabin via the “CABIN HEAT” pull knob under the pilot’s subpanel. The combustion heater is ignited with the “HTR” switch, and will consume fuel from the left main tank only at a rate of about one-half gallon per hour. The exchanged air can be very hot, so operators should take caution when applying the cabin heat to reduce pilot workload during critical phases of flight, and also to limit the possibility of a cabin fire. The rate of heating is controlled via the cabin vents and heater blower, as with equalization and air conditioning.



NOTE: The Analog Baron is equipped with a relatively unique air conditioning condenser system. The air conditioning condenser's air flow scoop, or "A/C Door" can be extended and retracted electromechanically. When the air conditioner is not in use, the door is fully stowed to minimize drag. When the air conditioner is used in flight, the door is only partially extended. When the air conditioner is activated and the landing gear is extended, the condenser door is fully opened to provide better cooling during ground operations. On the glareshield annunciator panel, there is an annunciator marked "AC DOOR" to indicate when the air conditioning condenser door is fully extended into the ground operation. The air conditioner should be turned off and the door retracted before takeoff to ensure maximum climb performance.

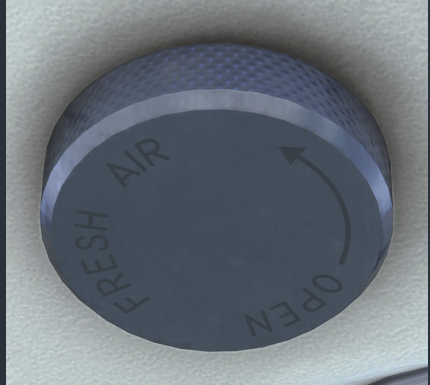

The additional drag produced by the air conditioner condenser's flow scoop will rob the aircraft of several knots when in cruise flight, but could produce as much as 10 knots worth of drag should the door become stuck in the fully extended position during flight.

NOTE: While the Analog Baron is certified for flight into known icing conditions, and therefore is equipped with deicing boots and windshield anti-icing, the windshield can be partially deiced using the defroster in the event of a primary systems failure. The "DEFROST" knob must be pulled, the "CABIN HEAT" knob must also be pulled, and the combustion heater must be operating.



# Reciprocating Engine & Turbocharger Simulation

The piston engine simulation in this aircraft is significantly more complex than most employed in flight simulators. Do not expect the care-free easy operation requiring little expert knowledge that is sufficient for operating the default aircraft. Knowledge of the invisible factors affecting fuel injected engine operation is required to perform a successful start of this aircraft. Additional knowledge is required to manage the turbocharged variant, as this is the first fully simulated turbocharger in MSFS.

## Fuel Injected Engine Operation

Fuel injected engines differ most significantly from their carbureted counterparts in their starting procedures. Fuel injected engines can be notoriously difficult to start soon after being shut down due to vapor lock.

### Cold Engine Starting

When starting a cold fuel injected engine (cylinder head temperatures within 100°F or 50°C of ambient temperature) the engine should start without difficulty, provided that it has been primed with the electric fuel pump. To quickly prime the engine, place both the throttle and mixture levers in the full forward position. Briefly run the fuel pump on high for a few seconds only. Prolonged use of the fuel pump will flood the cylinders with fuel. If difficulty persists, try engaging the starter while advancing the throttle partially.

### Hot Engine Starting

When the engine has recently been running, hot engine components will vaporize liquid fuel in the fuel injection system, causing back pressure that prevents the injection of new fuel into the cylinders for priming. This is most likely to occur when a hot engine has been sitting for more than 5-10 minutes, and less than an hour or two. Many ill informed pilots have drained their aircraft's battery trying to start a hot engine without the proper procedure.

To start a vapor locked engine, cool fuel from the fuel lines and tanks should be cycled through the fuel injector manifold with the throttle and mixture levers in their fully closed, and cut-off positions. This will have the effect of displacing and condensing the vapor, while not adding additional fuel to the cylinders. After running the fuel pump on high for 10-20 seconds, if the engine does not start normally, the operation should be repeated once or twice more, depending on the severity of the vapor lock. Attempting this procedure too many times may result in a flooded engine.

## Flooded Engine Starting

During starting procedures, if too much fuel is injected into the cylinders by running the fuel pump too long, the engine will no longer start due to an excessively rich fuel-to-air ratio. In mild cases, the engine can be started by advancing the throttle to produce a more favorable mixture; however, this can substantially increase the chances of an engine fire. In severe cases, the engine itself can be used as a pump to remove fuel from the cylinders. Cranking the engine will remove fuel from the cylinders, but may accumulate liquid and gaseous fuel vapors around the exhaust or inside the engine cowling. Unfortunately, light aircraft do not have a convenient way to crank the engine without ignition firing, like turbine engine aircraft do. Should the engine produce a backfire or other ignition source after severe engine flooding, a fire is likely. As a last resort, allowing the engine to sit for an extended period of time will allow fuel to evaporate from the cylinders and alleviate engine flooding.

## Backfiring

Backfires occur when the fuel-air charge in a cylinder combusts late in the cylinder's ignition phase, allowing the gasses and the sound of the explosion to escape out the open exhaust valve. This may occur under several different conditions. The most commonly experienced is when the magneto switch is accidentally cycled to the off position and returned to an ignition position when the engine is operating at high RPM. This results in an unburnt charge of fuel remaining in the cylinders and valve body for several full cycles, before a spark is reintroduced to the now overly rich fuel-air mixture. A similar effect can occur when an overly lean mixture is used at high power settings, which stifles ignition until a sub-optimal fuel-air charge is ignited. A backfire is also likely to occur at high power settings when there is significant spark plug fouling present, as the spark produced by the plug, if any, will be too weak to ignite the fuel-air charge.

## Spark Plug Fouling

Aviation fuel (Avgas) commonly contains tetraethyl lead to reduce engine knocking, and prevent premature ignition. Unfortunately, this lead can become deposited on interior cylinder surfaces under some conditions. This results in a layer of lead deposits accumulating on the spark plug electrodes, which prevents a spark from developing, or a sufficient spark for optimal ignition. The buildup of lead in the cylinders can happen surprisingly quickly; therefore, proper care is needed on every flight to avoid engine fouling, especially while operating on the ground.

Spark plug fouling can be avoided by leaning the mixture significantly while operating at low cylinder temperatures and low RPM. At sea level, leaning the mixture control halfway may be necessary. Alternatively, keeping engine temperatures warm while on the ground also prevents fouling. As a rule of thumb, an engine RPM of 1,200-1,500 is sufficient to prevent fouling by bringing cylinder head temperatures above ~300°F (120°C).

When spark plug fouling is present, the engine will run rough, and performance will be reduced. To remove lead buildup from the engine, the mixture should be leaned and throttle increased to produce high temperatures in the cylinders above ~750°F (400°C) for a few minutes.

## Turbocharged Operation

Owners of other turbocharged aircraft for Microsoft Flight Simulator will be familiar with the inaccurate need to lean the mixture continuously to maintain proper fuel-air mixture while below critical altitude. THIS IS NOT NECESSARY with the turbocharger simulation in this product. This simulation is also substantially more complex than other turbocharger simulations.

### Turbocharger Basics

Unlike car engines, which predominantly operate at near sea-level air pressures, aircraft engines may operate at sea-level pressure, and within the upper atmosphere where atmospheric pressure is less than one third of that at sea level. In a normally aspirated aircraft engine, the mixture control is used to maintain a favorable fuel-air ratio throughout these different altitudes. Unfortunately, as the amount of fuel per cylinder is reduced to match the air pressure, so too is engine performance reduced. A turbocharger uses high velocity exhaust gasses from the engine's combustion to compress the atmospheric air to a higher pressure. In this particular aircraft, the outside air is boosted to a pressure in excess of sea level ambient pressure, of 39.5 inHg. The higher pressure intake air allows for a greater mass of fuel and air to be burned per every stroke of the piston, increasing the power output of the engine for a given RPM.

### Critical Altitude

Simply put, the critical altitude of a turbocharged engine is the maximum altitude at which the turbocharger can compress the atmospheric pressure air to a specified maximum pressure. When the aircraft continues to climb beyond this altitude, manifold pressure will begin to drop, and the mixture must be leaned, just as with a normally aspirated engine. Critical altitude is listed in aircraft handbooks as a single altitude in feet; however, critical altitude as described above, is constantly changing throughout the flight.

The book value for critical altitude applies only in standard atmospheric conditions when pressure altitude is equal to density altitude. Otherwise, the critical altitude is based on density altitude, not pressure altitude, as is commonly thought. Additionally, the maximum rated intake pressure can only be maintained at the critical altitude at wide open throttle, when the compressor turbine is operating at maximum rated RPM. If the velocity of exhaust gas air is reduced by pulling back on the throttle when the wastegate is fully closed, the turbocharger will no longer be able to maintain maximum rated pressure at the manifold. When the aircraft is operating well beyond critical altitude, fully retarding the throttle may even cause the engine to cease combustion. For similar reasons, operators should be aware of the signs of turbocharger failure when operating at very high density altitudes, as a sudden failure of the turbocharger may present as a complete engine failure. Should the turbocharger fail in-flight, the engine may continue to be operated as a normally aspirated engine, but it is recommended that a landing be made at the nearest suitable airport.

## Operation Before & During Takeoff

Operating a turbocharged engine with an automatic wastegate is remarkably similar to operating a normally aspirated engine, as there is no need to manually control a wastegate, or significant worry about overboosting the engine. While on the ground, it's unlikely that any difference will be observed in the turbocharged engine, except for increased spool-up times to manifold pressures beyond sea-level. The mixture should still be leaned during ground operations to prevent spark plug fouling, but placed in the full rich position for takeoff. During engine runup, the sound of the turbocharger will likely be heard, and the manifold pressure will reach the 39.5 inHg redline regardless of density altitude, assuming the turbocharger is operational.

Applying takeoff power is the most likely time to inadvertently cause an overboost, as the oil viscosity may still be high, and slow the operation of the wastegate. When advancing the throttle through the last quarter of its movement, be especially careful to apply power slowly while monitoring manifold pressure.

## Operation During Climb & Cruise

The most noticeable difference between a normally aspirated engine and a turbocharged one is the lack of need to adjust the mixture setting during climb. Do not reduce throttle or mixture setting during the initial climb phase. There is no need to adjust the fuel-air ratio with the mixture control until critical altitude has been exceeded, or until the throttle is reduced in the cruise phase. When the aircraft climbs through the critical altitude, manifold pressure will begin to drop, and manual mixture control will be required to maintain desired cruise power.

If a reduced throttle setting is desired during cruise, manual control of the mixture setting may also be required. As the critical altitude is only guaranteed at wide open throttle, a reduced throttle setting may reduce turbocharger RPM to the point where the desired manifold pressure can no longer be maintained. For this reason, it is recommended to assess engine performance after every power adjustment when operating at high altitudes. Using an aid to engine leaning, such as the EDM-760 engine monitor in this aircraft, to precisely set the mixture for best power or best economy cruise can help ensure optimum performance, and increase engine longevity.

NOTE: For your convenience while leaning, the friction lock knob located on the right of the throttle quadrant can be used to increase the fidelity of mixture control adjustments via the mouse wheel. Roll the friction lock clockwise (drag up) to make very fine adjustments to the mixture control.

## Operation During Landing & Securing

The approach and landing phases are very similar to normally aspirated engines, except that engine performance may be reduced more than would be expected for a given change in throttle setting when operating at higher altitudes. After exiting the runway, be sure to give the turbocharger enough time to cool at turbine idle RPM before stopping the engine. This is more important in colder ambient temperatures to prevent warping of the turbocharger shaft.

# Tips on Operation within MSFS

## Engine Limits and Failures

When you operate an engine beyond its limits, damage to the aircraft is accumulated according to the severity of the limit exceedance, and the type of limit exceeded. For instance, exceeding maximum allowed cylinder head temperatures will drastically reduce the lifespan of the engine, while a slight exceedance of the maximum governed propeller RPM would not cause an engine failure for quite some time. Keen monitoring of engine parameters via the EDM-760 engine monitor is an essential skill of operating a high performance aircraft. The engine monitor is equipped with alarms, which will illuminate an LED on the glareshield panel to alert you to a potentially dangerous engine condition. If engine parameters are not brought back within limits soon, the engine will fail.

NOTE: The “Engine Stress Failure” option must be enabled in the MSFS Assistance menu for the engine to fail completely.

The following limits are recommended for best engine health. Exceeding these limits will cause engine damage in proportion to the limit departure:

Propeller RPM	2700 RPM
Cylinder Head Temperature (CHT)	460°F (238°C)
Exhaust Gas Temperature (EGT)	1600°F (870°C)
Engine Oil Temperature	240°F (116°C)
Fastest Cooling Cylinder Head	60°F/min (33°C/min)
Turbine Inlet Temperature (TIT)	1650°F (900°C) (Turbocharged Aircraft Only)

Exceeding the engine starter limitations stated in this manual significantly will permanently disconnect the starter from electrical power. Be aware that the Baron does not possess any annunciators pertaining to starter motor overheat, so failure conditions can arise unannounced.

## Electrical Systems

The native MSFS electrical simulation is greatly improved from previous versions of Flight Simulator, but the underlying equations are unfortunately inaccurate. Users familiar with electrical engineering should keep in mind that the battery has no internal resistance; however, battery charging rate is correctly simulated in this aircraft, meaning that the battery charge rate in amps is proportional to the voltage difference between the aircraft generators and the battery. Battery charging rate should be kept to a minimum whenever possible, and takeoff limits should be observed. If the charge rate exceeds 10A, heat will slowly build up in the battery circuitry. If the battery is not disconnected from the power source, or the rate of charging reduced, the battery terminals will become damaged and the battery will not be available for use on the remainder of the flight. High battery charging rates are acceptable after startup while the battery is recharging; however, care should be taken while taxiing to avoid overcharging the battery.

## Deicing and Anti-Icing Systems

Ice accumulation and mitigation has been buggy since the release of MSFS. As of Sim Update 11 (SU11), the underlying variables for airframe, engine, pitot-static, and windshield icing have been verified to be working correctly. Unfortunately, the exterior visual airframe icing may continue to accumulate regardless of attempted ice mitigation. Apart from the visual appearance, this should not affect the performance of the aircraft. Windshields are always able to be cleared by deicing equipment, thankfully.

The Analog Baron is equipped with propeller deicing, pitot heat, fuel vent heat, stall warning heat, windshield heat, deicing boots, and windshield defrosters. Electrical anti-icing for the propellers, pitot-static probes, stall warning heat, windshield heat, and fuel vent heat work continuously, and will slowly remove ice from these areas of the aircraft. On the other hand, emergency window defrosting is provided by the cabin heating system, and requires the following conditions to be met: the “DEFROST” knob must be pulled, the “CABIN HEAT” knob must also be pulled, and the combustion heater must be operating. For more information on the defroster and its associated controls, see the Environmental Controls section of this manual.

Lastly, the aircraft is also equipped with deicing boots that use the instrument air supply to inflate, either manually, or automatically, to shed ice from the leading edges of the aircraft. The surface deicing switch may be placed in either the momentary “MAN” position to pressurize all zones of the aircraft’s deicing boots at once, or in the “AUTO” position to automatically cycle deicing pressure around the three deicing boot zones. The deicing pressure gauge should indicate a maximum of around 18 PSI when the system is activated in automatic mode, and 16 PSI when in manual mode. This pressure may be further diminished if the standby door seal valve is open and the standby door seal button is depressed while using the deicing boots.

## Third Party Navigation and GPS Systems

There now exist a number of freeware and payware products to enhance or add advanced navigation systems to MSFS. For example, the TDS GTNxi 750/650, the PMS50 GTN 750/650, and the Working Title GNS 530/430. Several of these advanced GPS units implement their own autopilot managers out of necessity, with the Working Title GNS being the latest to do so. They may also require the use of their own special variables to be compatible with an aircraft’s radionavigation equipment. Accommodating all these different products is not trivial. Black Square’s hot-swappable avionics system, and failure system to a lesser extent, have compounded the difficulty.

While existing Black Square aircraft have required an update to be fully compatible with some of these new products, the Analog Baron should be fully compatible with these products upon release. Users should notice only minor interruptions when switching between GPS units, such as waiting for a GPS to reboot, or an uncommanded autopilot disconnect or mode change. As development continues on these 3rd party products, Black Square will continue to work with the developers to update the fleet, and bring you the most realistic flying experience possible.

## Mixture & Fuel Flow


Unfortunately, the MSFS internal combustion simulation is lacking as it concerns mixture and fuel flow. Under all but extremely high density altitude conditions, reducing the mixture setting should always result in decreased fuel flow at the same throttle setting. In MSFS, fuel flow will fall off as horsepower decreases with an overly rich mixture setting. This is not detrimental to the operation of this aircraft, but is nevertheless unrealistic. A potential solution is being researched for future Black Square aircraft, and updates for the Analog Baron.

## Failure Configuration & System Status

This aircraft is equipped with an underlying software system that is capable of triggering a failure of almost any simulated aircraft system, either by random, or at a scheduled time. An interface for configuring failure settings, resetting failures, or monitoring active failures is provided in the “NAV” and “LOG” modes of the in-panel weather radar. A list of all possible failures is provided below. Failures are saved between flights, leaving you to discover what has failed during your checklists.

### Systems Screen

To access the “SYSTEMS” menu, rotate the mode knob on the weather radar to “NAV”. On the screen shown, you will be presented with a segmented bar graph indicating the current engine condition, and several options. Using the keys on the weather radar bezel indicated by the YELLOW text and accompanying arrows, you can repair the engine, resetting its condition to 100%, refill the oxygen system, or reset all failures. Resetting all currently active failures will return the aircraft to a state with no failures and all systems functioning normally.

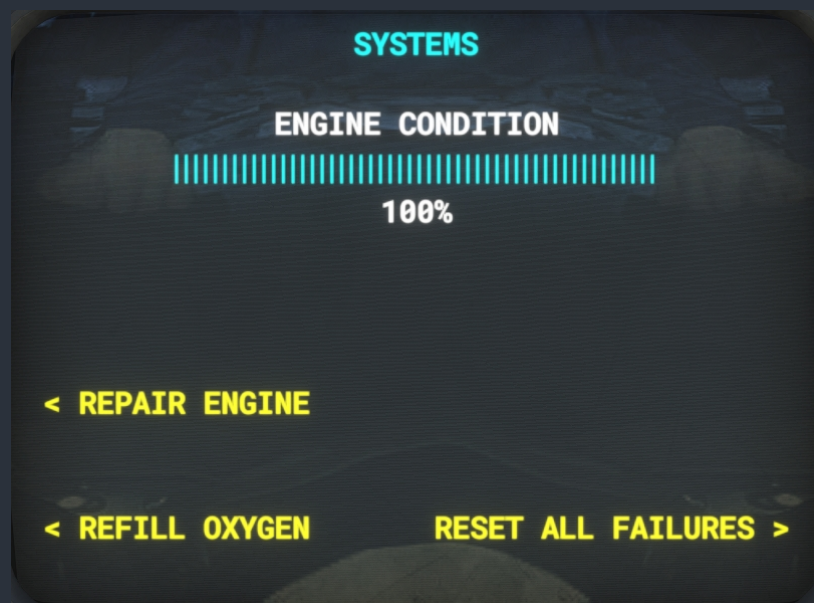

### Failures Screen

To access the “FAILURES” menu, rotate the mode knob on the weather radar to “LOG”. On the screen shown, you will be presented with a segmented bar graph indicating the current global failure rate as a multiplier of real-time. You may increase or decrease the global failure rate by powers of two with the keys on the weather radar bezel as indicated in YELLOW on the screen. The maximum allowable multiplier is 1024x. Random failures can be completely disabled by pressing the indicated decrease key until the global failure rate indicates “NO FAILURES”. The global failure rate multiplies the probability of random failures occurring while in “RANDOM” failure mode based on their selected Mean Time Between Failure (MTBF). For Example, if a



specific failure is expected to occur once in every 5,000 hrs of simulated flight time, a global failure rate of 1024x, will result in this failure occurring roughly once in every 5 hrs of simulated flight time instead. Settings between 8x and 32x are recommended to add a little excitement to your virtual flying experience, as many hundreds of hours can be flown a 1x real-time failures without encountering a single failure, while settings above 256x almost guarantee multiple failures per flight.



From the failures page, one can also toggle between “RANDOM” and “SCHEDULED” failure modes. (currently active mode is indicated in MAGENTA) All failure settings can be reset to defaults from this page, for which a confirmation warning message will be displayed. Confirming the reset will return all MTBF times to system specific default values, return all scheduled failure times to default, and disable any currently armed scheduled failures. Any currently active failures can be viewed by navigating to the “ACTIVE FAILURES” page, and failures can be configured via the “DETAILED SETTINGS”. The detailed settings page is context sensitive, and will be different depending on whether the failure system is currently in random or scheduled mode.

## Random Failures Screen

From the random failures screen, one can set custom failure probabilities in the form of Mean Time Between Failure (MTBF) time in hours. While real world electromechanical components follow an exponentially decaying failure probability after their fabrication, this would be inconvenient for users of virtual aircraft, since it would subject new users to high component mortality rates just after purchasing the product; therefore, the probability of component failure is constant throughout aircraft operation. This means that the probability of failure can be considered to be exactly the mean at all times. Upon loading the aircraft for the first time, default values will be displayed for each system, which are representative of their real world counterparts. These values can be modified by navigating to a failure using the “RNG” up and

down keys on the weather radar bezel, and the “TRK>” key to move the cursor over to the MTBF column. Further use of the “RNG” keys will adjust the MTBF. Use the “<TRK” key to return the cursor to the list of failures. Failures are color coded into groups. Magenta is used for catastrophic engine failures, red for major systems failures, white for electrical bus distribution failures, and cyan for circuit breaker protected systems failures. The minimum allowable MTBF is 100 hrs, and the maximum is 1,000,000 hrs.

FAILURE	MTBF (HRS)
ENGINE FAILURE	500,000
ENGINE FIRE	700,000
MAIN FLAP MOTOR	5,000
STBY FLAP MOTOR	10,000
ELEC BUS 1-1	80,000
STBY POWER 1	200,000
< BACK	

## Scheduled Failures Screen

From the scheduled failures screen, individual failures can be scheduled to occur between specific times after the current time. Failures have a constant probability of occurring between the two times listed in minutes, and will only occur after the failure’s “ARM?” value has been set to “Y”. Upon loading the aircraft for the first time, default values will be displayed for each time. These times can be modified by navigating to a failure using the “RNG” up and down keys on the weather radar bezel, and the “TRK>” key to move the cursor over to the other columns. Scheduled failure times can then be adjusted with further use of the “RNG” up and down keys. The “ARM?” flag can be set with either the “RNG” up or down key. Use the “<TRK” key to return the cursor to the list of failures. Failures are color coded into groups. Magenta is used for catastrophic engine failures, red for major systems failures, white for electrical bus distribution failures, and cyan for circuit breaker protected systems failures. The minimum allowable time is 1 minute, and the maximum is 480 minutes, or 8 hours.

FAILURE SETTINGS (SCHEDULED)			
FAILURE	ARM?	AFTER	BEFORE
WX RADAR CONTROLLER	N	10	30
WX RADAR ANTENNA	N	10	30
VACUUM PUMP	Y	10	20
PITOT BLOCKAGE	N	60	300
STATIC BLOCKAGE	N	60	300
L BRAKE	N	60	300

< BACK TIME IN MINUTES

## Active Failures Screen

From the active failures screen, one can scroll through a list of all active failures affecting the aircraft. Only failure names are displayed, and they can be scrolled through using the “RNG” up and down keys on the weather radar bezel. When the blinking cursor has a failure selected, pressing the “TRK>” key will reset the highlighted failure, returning the system to normal operation. Failures are colored in groups. Magenta is used for catastrophic engine failures, red for major systems failures, white for electrical bus distribution failures, and cyan for circuit breaker protected systems failures.

ACTIVE FAILURES	
FAILURE	
ANNUNCIATOR PANEL	
L TURN COORDINATOR	
OXYGEN LEAK	

< BACK RESET SELECTED >

## Failure System HTML Interface

To facilitate users who wish to initiate failures instantaneously via an external software interface, such as an instructor station, webpage, or tablet interface, access has been provided into the failure system using MSFS's HTML events. Any software that is capable of sending HTML events (also known as H:Vars), is capable of triggering failures without any additional configuration. These failures will appear in the in-cockpit weather radar interface discussed above, and can be reset from the same interface, or by sending the same HTML event again.

This interface allows users to create and share profiles for popular 3rd party interface applications to trigger and reset failures, or even mimic more complex emergency scenarios. Popular software capable of sending HTML events to MSFS include:

- Air Manager
- Axis and Ohs
- Mobiflight
- SPAD.neXt
- FSUIPC
- Many other SimConnect-based interfaces

To trigger or reset any failure in any Black Square aircraft, simply send an HTML event with the prefix "BKSQ\_FAILURE\_", and the exact name of the failure as it appears in the in-cockpit weather radar interface with spaces replaced by underscores.

For example, to trigger or reset a failure named "L FUEL QTY", the HTML event would be:

```
>H:BKSQ_FAILURE_L_FUEL_QTY
```

Depending on your programming environment, be sure to check the exact syntax needed to trigger HTML events. Some graphical programming environments may require you to omit the leading ">" from the event, while others may require this ">" to be expressed as "&gt;", such as in reverse polish notation.

# List of Possible Failures

## Major System Failures

L ENGINE FAILURE  
R ENGINE FAILURE  
L ENGINE FIRE  
R ENGINE FIRE  
L ENG L MAGNETO  
R ENG L MAGNETO  
L ENG R MAGNETO  
R ENG R MAGNETO  
L ENG L MAGNETO GROUNDING  
R ENG L MAGNETO GROUNDING  
L ENG R MAGNETO GROUNDING  
R ENG R MAGNETO GROUNDING  
L IGNITION SWITCH GROUND  
R IGNITION SWITCH GROUND  
L TURBOCHARGER (only in turbocharged aircraft)  
R TURBOCHARGER (only in turbocharged aircraft)

L ALTERNATOR  
R ALTERNATOR  
INSTRUMENT AIR  
PITOT BLOCKAGE  
STATIC BLOCKAGE  
L BRAKE  
R BRAKE  
L FUEL LEAK  
R FUEL LEAK  
L TIP TANK LEAK  
R TIP TANK LEAK  
CABIN SAFETY VALVE (only in pressurized aircraft)  
CABIN OUTFLOW VALVE (only in pressurized aircraft)  
INFLOW CONTROL UNIT (only in pressurized aircraft)  
DOOR SEAL PRIMARY (only in pressurized aircraft)  
DOOR SEAL STANDBY (only in pressurized aircraft)  
DEICE BOOTS INTEG  
OXYGEN LEAK  
CABIN HEATER CO LEAK  
L ENG CO LEAK  
R ENG CO LEAK  
CO DETECTOR  
CONDENSER LIMIT

## Circuit Breaker Protected Failures

L STARTER MOTOR  
R STARTER MOTOR  
FLAP MOTOR  
L FUEL PUMP  
R FUEL PUMP  
L TIP TANK X-FER PUMP  
R TIP TANK X-FER PUMP  
GEAR MOTOR  
GEAR WARNING  
GEAR MONITOR  
L FUEL QTY

R FUEL QTY  
L TACH AND FF GAUGES  
R TACH AND FF GAUGES  
L OIL AND CYL GAUGES  
R OIL AND CYL GAUGES  
STANDBY AVIONICS  
TURN COORD  
VOLTMETER  
YOKE CHRONOS  
LANDING GEAR POS LIGHTS  
ANNUNCIATOR LIGHTS  
ACCESSORIES POWER  
VENT BLOWERS  
AIR CONDITIONER  
AIR CONDITIONING BLOWER  
CABIN HEAT IGN  
CABIN HEAT BLOWER  
ENGINE MONITOR  
STALL WARNING  
DEICE BOOTS  
PROP SYNC  
L PITOT HEAT  
R PITOT HEAT  
PROP HEAT  
WINDSHIELD HEAT  
FUEL VENT HEAT  
STALL WARN HEAT  
CABIN PRESS CONTROL (only in pressurized aircraft)  
DOOR SEAL PUMP (only in pressurized aircraft)  
STROBE LIGHT  
BEACON LIGHT  
NAV LIGHTS  
TAXI LIGHTS  
L LANDING LIGHTS  
R LANDING LIGHTS  
WING LIGHT  
PANEL LIGHTS  
CABIN LIGHTS  
AUDIO PANEL  
REMOTE COMPASS  
GYRO SLAVING  
COM 1  
COM 2  
NAV 1  
NAV 2  
RNAV  
TRANSPONDER  
AUTOPILOT CONTROLLER  
AUTOPILOT ACTUATORS  
ADF  
WX RADAR CONTROLLER  
WX RADAR TRANSCEIVER  
RADAR ALTIMETER  
HSI  
DME  
ENCODER  
LOW THRUST DETECT

## Miscellaneous Systems

### Audible Warning Tones

This version of the Baron comes equipped with several warning tones to alert the operator to important configuration changes, or potentially dangerous situations. These tones can be disabled by pulling the circuit breaker for the respective tone's underlying warning system. These tones are as follows:

- Altitude Alerter Tone: A traditional C-Chime will sound when the aircraft is within 1,000 ft of the selected altitude displayed on the KAS 297B Altitude Selector.
- Autopilot Disconnect Tone: Whenever the autopilot is disconnected via the autopilot master push button, the control yoke mounted disconnect buttons, or automatically disconnects when overpowered, a warning buzzer will sound.
- Stall Warning Horn: When the aircraft is within approximately 5-10 knots of stalling speed, a constant tone warning horn will sound.
- Overspeed Horn: When the aircraft exceeds the VNE (red line) airspeed on the airspeed indicator, a repeating beeping tone warning will sound until the speed of the aircraft is reduced to below VNE.
- Gear Configuration Warning Horn: When both throttle levers are reduced below approximately 20% of their travel, or the flaps are placed in their landing configuration, and the landing gear has not been deployed, a repeating tone will sound.
- Carbon Monoxide Detector: When an engine or the combustion heater becomes compromised, it is possible for poisonous gas to leak into the cabin of the aircraft. When this colorless, odorless, gas is present, a beeping alarm will sound. The alarm will continue to sound as long as the gas is present. Follow the checklists for Carbon Monoxide leaks, and close (pull) the cabin pressurization air shutoff valves immediately if operating the pressurized version of this aircraft.
- Engine Cooling Ticking: The ticking sound an engine makes after shutdown while it cools and contracts is modeled in this simulation. This sound can be used to roughly estimate when temperatures are high enough in the engine cowling to vaporize fuel and contribute to vapor lock.

NOTE: Have you ever noticed that the wind sound in all other MSFS aircraft is erroneously based on true airspeed rather than indicated airspeed? This makes wind noise during high altitude cruise far too loud. It's likely the result of there being no persistent indicated airspeed simulation variable that is not affected by pitot-static failures. All Black Square aircraft now have wind sounds based on indicated airspeed, which makes them much more enjoyable to fly at high true airspeed.

## Range Extending Devices (Tip Tanks & Winglets)

One of two Analog Baron configurations may be selected for flight from the main menu. They are: Normally Aspirated with no winglets (same as default G58), and Pressurized (58P “P-Baron”) with Tip Tanks and Winglets. The tip fuel tanks add 30 U.S. Gallons of usable fuel to the Analog Baron at the cost of approximately 30 lbs of empty weight. This extra fuel will extend the range of the aircraft by approximately 25%, resulting in a normal operating range of 1,500 nm, and maximum operating range in excess of 1,600 nm.

Fuel quantities in the tip tanks are monitored via separate indicators at the far right-hand side of the main instrument panel. The quantity shown on this instrument must be added to the quantity shown on the main fuel quantity gauges to obtain the current total fuel quantity. The EDM-760 engine monitor will automatically detect the presence of tip tanks and adjust accordingly for accurate fuel totalizer behavior.



Fuel must be manually transferred from the tip tanks to the main tanks to be used. This is accomplished with two electrically powered “Facet-Style” solenoid fuel pumps. These pumps are activated by two toggle switches mounted on the main instrument panel labeled “TIP TANK TRANSFER PUMPS”. When the pump is running, an integrated green indicator light will illuminate within the toggle switch, and the pump’s distinctive pulsating sound should be audible. When there is no fuel remaining in the tip tank, the pump will cease operation automatically. Each pump is capable of transferring approximately 36 gallons of fuel per hour.



Should a user have a strong desire for a turbonormalized Analog Baron, turbocharged without winglets, turbocharged without pressurization, or normally aspirated with winglets, any one of these options is possible with a simple community mod. These options have simply been omitted here to reduce clutter in the aircraft selection menu, and help differentiate the Analog Baron from the default G58 Baron. To do so, simply create a new aircraft mod with the adjusted weight and balance information, engine parameters, or other modifications, and new flight files (\*.flt), containing the desired permutation of the following lines.

NOTE: While this process looks very similar to creating a livery-only community mod, it is necessary to also include all the config files, not just aircraft.cfg. Give your aircraft configuration a new name (ui\_type) in aircraft.cfg, so that a whole new aircraft type is added to the aircraft selection UI, not just a new livery.

```
[LocalVars.0]
BKSQ_Turbocharged=1
BKSQ_Pressurized=1
BKSQ_TipTanks=1
BKSQ_Winglets=1
```

## Turbocharger Sound

For users who find the high-pitched whine of turbocharger annoying, the sound can be disabled while retaining the function of the turbocharger by setting **BKSQ\_TurbochargerSound=0**, using the LocalVar method described above.

When the throttle is advanced too rapidly, or with cool oil, the wastegate may not react quickly enough to prevent an overboost condition. Should this occur, a pressure relief poppet valve will open, emitting an audible hissing sound.


## VOR & ADF Signal Degradation

Unlike in the real world, navigation receivers in Microsoft Flight Simulator produce only ideal readings. Signal strength is not affected by distance, altitude, terrain, or atmospheric conditions. When a station is out of range, the signal is abruptly switched off. This is unrealistic, and does not give the feel of navigating with the physical systems of the real aircraft.

All Steam Gauge Overhaul and future Black Square aircraft solve this problem by providing variables for VOR and ADF indications with distance and height above terrain based signal attenuation and noise. This noise is mathematically accurate for the type of signal (phased VHF for VOR, and MF for NDB), and adheres to the international standards for station service volumes. Combined with the two-pole filtering and physics of the instrument's needles in the cockpit, this creates a very convincing facsimile of the real world instrument's behavior. The To-From indicators of the VOR instruments will even exhibit the fluttering that is characteristic of the "cone of confusion" directly over the ground-based stations that pilots are taught to recognize during instrument training.



# Overview Electrical Schematic

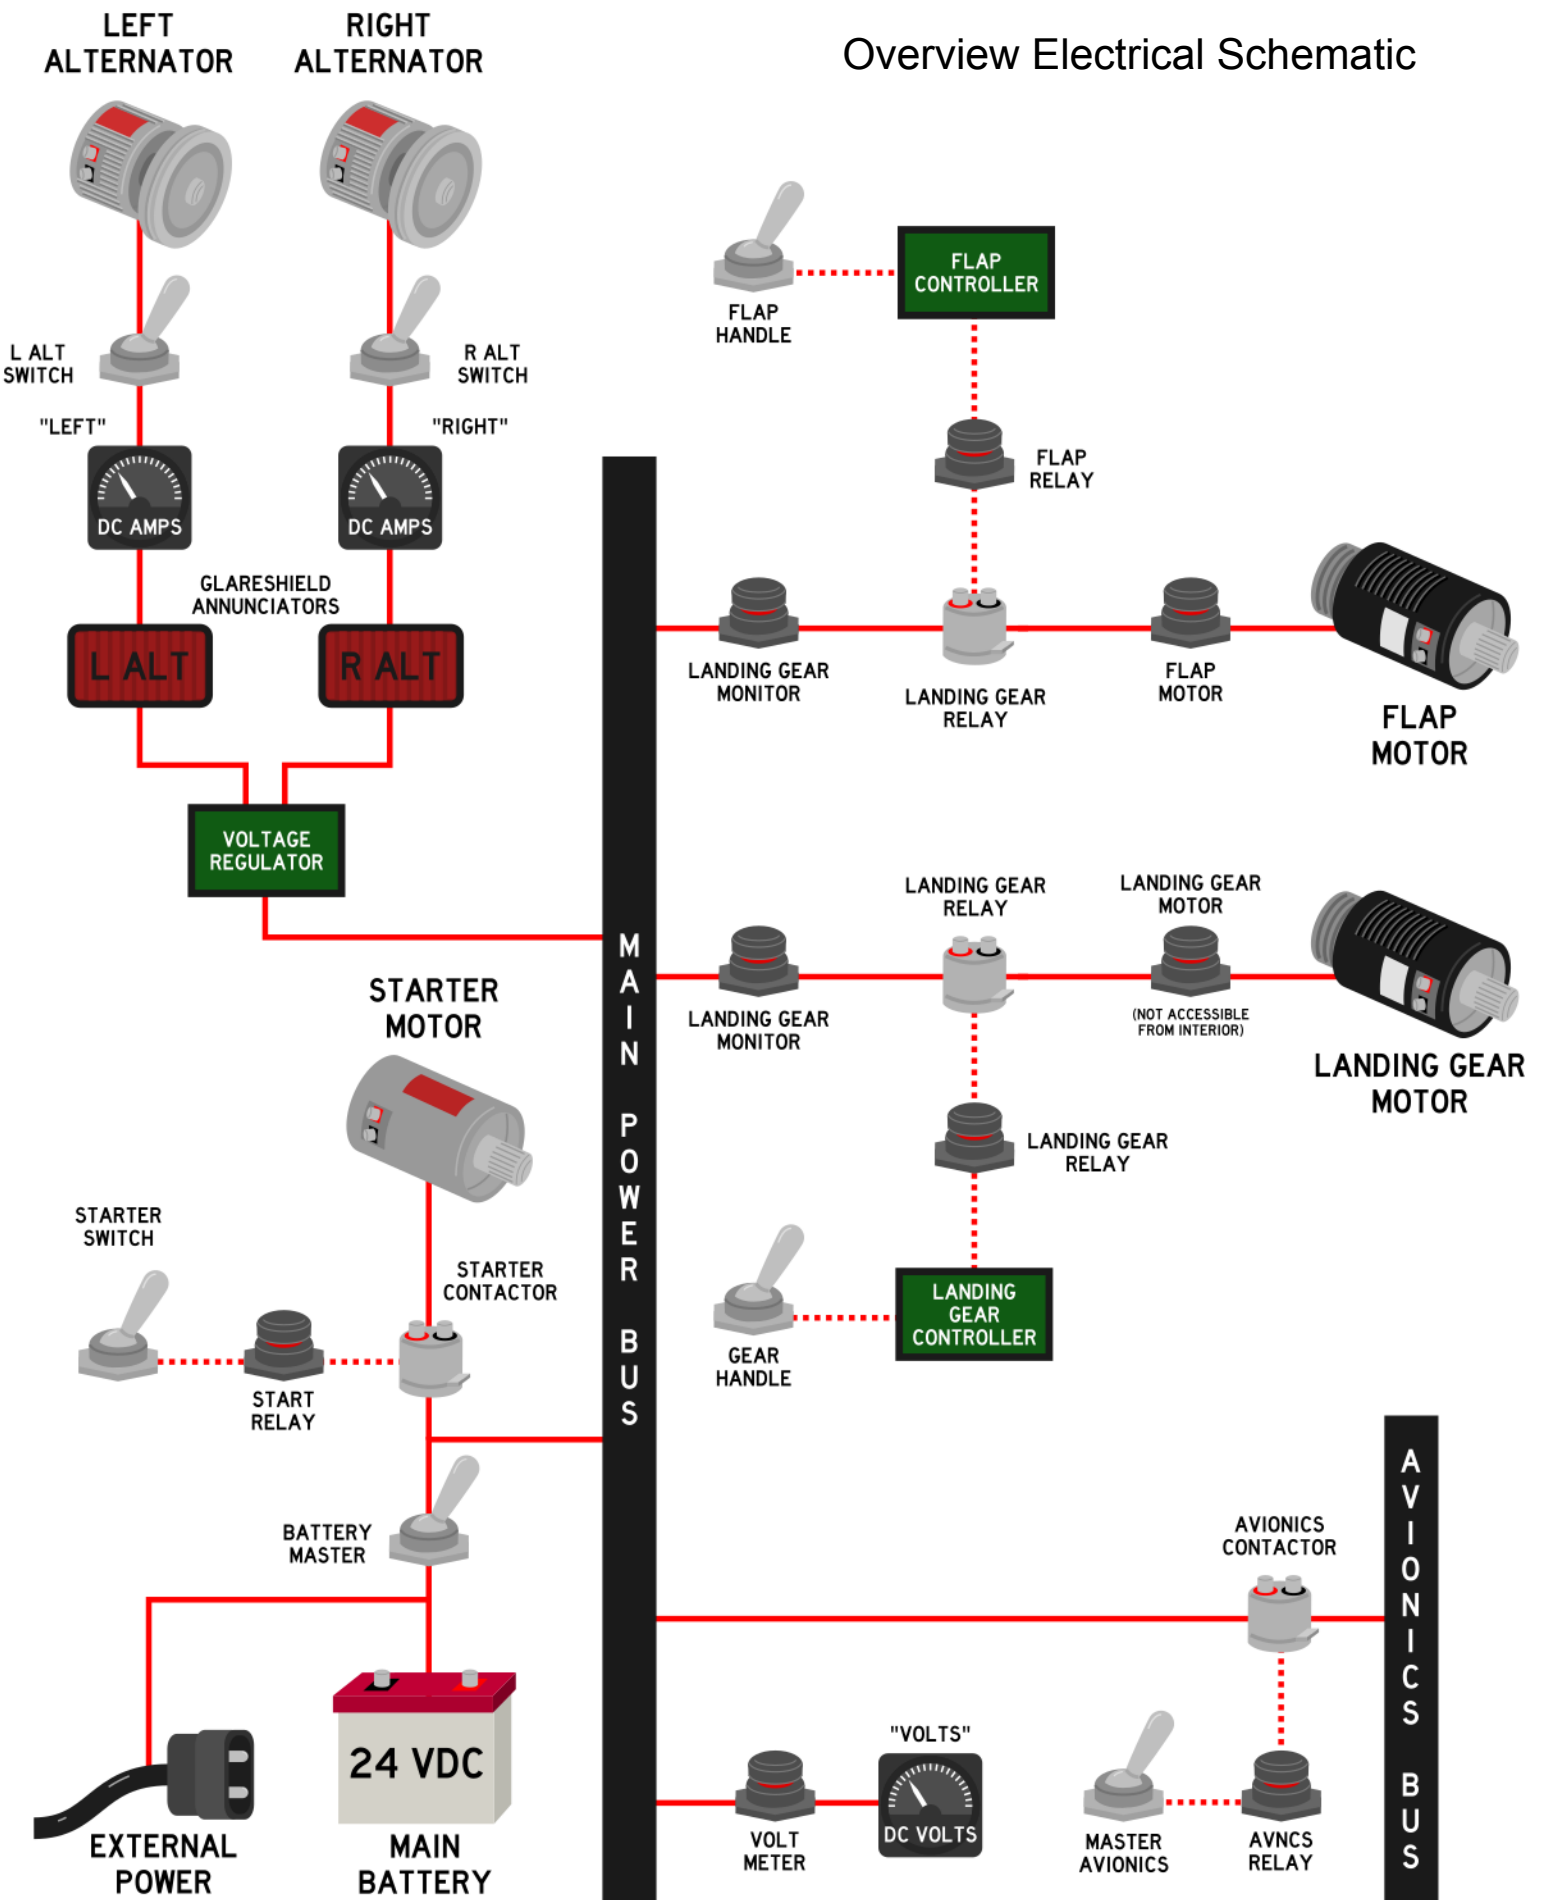

## Using the KNS-81 RNAV Navigation System



### The Concept

When most pilots hear the acronym “RNAV”, they probably think of the modern RNAV, or GPS approach type, or precision enroute navigation for airliners; however, long before this type of navigation, there was the onboard RNAV computer. This 1980’s era piece of early digital computer technology allowed pilots to fly complex routes with precision away from traditional ground-based radionavigation sources, such as VOR’s and NDB’s, and fly much shorter routes as a result. As the technology improved, even an early form of RNAV approaches became possible. Before GPS, the onboard RNAV computer allowed for GPS-like flying in a sophisticated package of digital electronics, marketed towards small to mid-size general aviation aircraft.

### How it Works

To understand how the RNAV computer works, consider the utility of being able to place a ground-based VOR antenna anywhere you like along your route. If your destination airport does not have a radionavigation source on the field, you could simply place one there, and fly directly to or from it. You could also place an antenna 10 miles out from a runway to set up for a non-precision approach. You could even place an antenna on the threshold of a runway, set your HSI course to the runway heading, and fly right down to the runway with lateral guidance; in fact, this is how an ILS receiver works. The KNS-81 Navigation System allows the user to “move” a virtual VOR antenna anywhere they like within the service volume (area of reliable reception) of an existing VOR antenna.

### “Moving” a VOR

To “move” a VOR antenna to somewhere useful, we must know how far from the tuned VOR station we would like to move it, and in what direction. These quantities are defined by a nautical mile distance, and a radial upon which we would like to move the antenna. For example, to place a virtual VOR 10 miles to the Southwest of an existing station, we would need to enter the station’s frequency, a displacement radial of 225°, and a displacement distance of 10.0 nm. Once we have entered this data into the RNAV computer, the resulting reading from

this new virtual VOR station will be indicated on our HSI in the same manner as any other VOR, assuming the HSI source selector switch is set to “RNAV”, and not “NAV1”. This means that you can rotate the course select adjustment knob to any position you like, to fly to/from from the new virtual station on any radial or bearing, so long as you stay within the service volume of the tuned VOR station.

## Data Entry

Now that you understand the basics of RNAV navigation, let’s learn how to enter the data from above into the KNS-81. On the right side of the unit, you will find the “DATA” push button, and the adjacent data entry knob. Along the bottom of the display, “FREQ”, “RAD”, and “DST”, annunciators remind you of the order in which data should be entered, frequency first, then radial, and finally distance. At any given time, one of these annunciators is bracketed to indicate which type of data is being entered. Press the “DATA” push button to cycle through the data entry process, and use the data entry knob to tune a frequency, enter a radial, and finally a distance.

## Data Storage Bins

On the left of the display, a 7-segment display marked “WPT” indicates the current RNAV waypoint for which data is being shown and edited on the right of the display. The KNS-81 can hold up to ten different combinations of frequency, radial, and distance data at one time. This can be greatly useful while planning a flight on the ground. To cycle through waypoints, rotate the inner knob of the dual concentric rotary encoder on the left of the unit’s face. The active waypoint currently being used by the computer and subsequently displayed on the HSI and DME instruments can be selected by pressing the “USE” button while the desired waypoint is being displayed. Whenever the currently displayed waypoint is different from the currently active waypoint, the number of the currently displayed waypoint will flash continuously.

## Distance Measuring Equipment

Most notably different than this unit’s predecessor unit, the KNS-80, is the lack of integrated DME information. The KNS-81 was designed to be used as a secondary, or tertiary navigation radio with an external DME display installed elsewhere on the panel. In this case, a KDI-572R fulfills this role. The KDI-572R is a traditional Distance Measuring Equipment (DME) display, with an extra rotary selector position to display RNAV information. See this manual’s section on the KDI-572 for complete information on operation. It should be noted that, like all other DME displays, this one is similarly dependent on being within the VOR service volume, and having good line-of-sight reception of the station. It should also be noted that these distances, speeds, and times, are based on slant-range to the station, not distance along the ground, as one would draw on a map. For most procedures, it was determined that this fact did not make such a large difference as to be detrimental to the procedure, but pilots should still be aware of the distinction. The KNS-81 also possesses a “RAD” toggling push button, which will force the DME display to indicate the current radial upon which the aircraft sits, relative to the waypoint.

## Modes of Operation

Lastly, on the left side of the display, the KNS-81's many modes are annunciated. The KNS-81's modes fall into two categories; VOR and RNAV, and are activated by rotating the outer dual concentric knob on the left of the unit's face. The VOR modes allow for the driving of an HSI with traditional VOR and ILS (including glideslope) data from the unit's third VHF navigation receiver. The VOR mode allows for behavior identical to a standard VOR receiver, with 10° of full-scale deflection to either side of the HSI's course deviation indicator (CDI). The PAR mode, which puts the CDI in a "PARallel" mode of operation, and linearizes the course deviation to +/- 5 nm full-scale deflection. This can be useful for tracking airways more accurately. In the two RNAV modes, CDI deflection is based on the displaced virtual VOR of the currently active waypoint. There are two RNAV modes, "RNV/ENR" (Enroute), which drives the CDI with linear deflections of +/- 5 nm full-scale, and "RNV/APR" (Approach), which drives the CDI with linear deflections of +/- 1.25 nm full-scale. Lastly, the KNS-81 has a momentary display mode, which can be activated by holding the "CHK" push button. This mode will display the aircraft's current position relative to the tuned physical VOR station. Pressing the "RTN" button will return the data displays to the active waypoint being used for navigation.

### Modes in Summary:

- VOR:** Angular course deviation, 10° full-scale deflection, just like a third NAV radio.
- VOR/PAR:** Linear course deviation, 5 nm full-scale deflection, useful for existing airways.
- RNV:** Linear course deviation, 5 nm full-scale deflection, displaced VOR waypoints.
- RNV/APR:** Linear course deviation, 1.25 nm full-scale deflection, displaced VOR waypoints.

## Other Possible Uses

Another possible use for the RNAV Navigation System is simply determining your distance away from an arbitrary point within a VOR service volume. This can be useful for many applications, such as ensuring that you remain clear of controlled airspace, or a temporary flight restriction (TFR). It could also be used for maintaining a certain distance away from a coastline, or flying circles around a target on the ground. A further possible use for the RNAV Computer is enhanced VOR "Fencing", such as for avoiding special use airspace, military operations areas, international airspace borders, or Air Defense Identification Zones (ADIZ), or descent planning, or radionavigation switchover points. Finally, one of the most useful applications of the RNAV System is in establishing holding patterns. Before GPS, holding pattern entry and flight could be even more confusing than it already is today. With an RNAV computer, a holding point entry waypoint can be placed anywhere, and flown around like there is a purpose-placed ground-based transmitter at the entry point.









## Recommended Skills

1. Direct Route Navigation
2. Parallel Flight along Airways
3. Location & Distance from Waypoints
4. Enhanced Geo-Fencing
5. Maintaining Distance from Ground Points
6. Holding Pattern Entries
7. Fly a Rectangular Course

## Direct Flight to Airport Tutorial


Lastly, as a first illustration of the power within the RNAV navigator, follow these steps to fly from any location within the chosen VOR service volume directly to an airport of your choosing without the need for any colocated navigational aid.

1. Locate the nearest VOR station to your desired destination, and its frequency, radial, and distance from the destination airport. While other station frequencies, radials, and distances can be found on approach, arrival, and departure charts, the easiest place to start is often with a mobile app or website that lists nearby stations along with other airport information. Examples include: ForeFlight, Garmin Pilot, FltPlan Go, SkyVector.com, and Airnav.com. These radials and distances can also be calculated during preflight planning by hand with a plotter, or with most flight planning software applications. In this case, we will use SkyVector.com to search for a destination airport, in this case, Beverly Airport in the US state of Massachusetts.

Nearby Navigation Aids							
ID	Name	Freq	Radial / Range		ID	Name	Freq Bearing / Range
 <b>LWM</b>	LAWRENCE	112.50	154°	12.3	 <b>OW</b>	STOGE	397 198° 29.4
 <b>BOS</b>	BOSTON	112.70	029°	14.0	 <b>MJ</b>	FITZY	209 302° 31.9
 <b>NZW</b>	SOUTH WEYMOUTH	133.40	017°	26.1	 <b>ESG</b>	ROLLINS	260 005° 38.4
 <b>MHT</b>	MANCHESTER	114.40	145°	26.3	 <b>CO</b>	EPSOM	216 323° 39.9

In the fourth block of data, we are presented with four nearby VOR stations (on the left), all providing good coverage to Beverly Airport. To assess whether or not a VOR provides good service to your destination, reference the following chart for VOR service volumes published by the Federal Aviation Administration. For the vast majority of VOR stations, reception will be acceptable within 40 nm of the station while in-flight, and is usually the only volume worth considering for low altitude general aviation flights.

For this example, we will choose the nearest VOR at Lawrence Airport, (LWM). This VOR has a frequency of 112.50 Mhz, a radial to Beverly Airport of 154°, and a distance of 12.3 nm. These are all three pieces of data that we need to fly directly to Beverly.

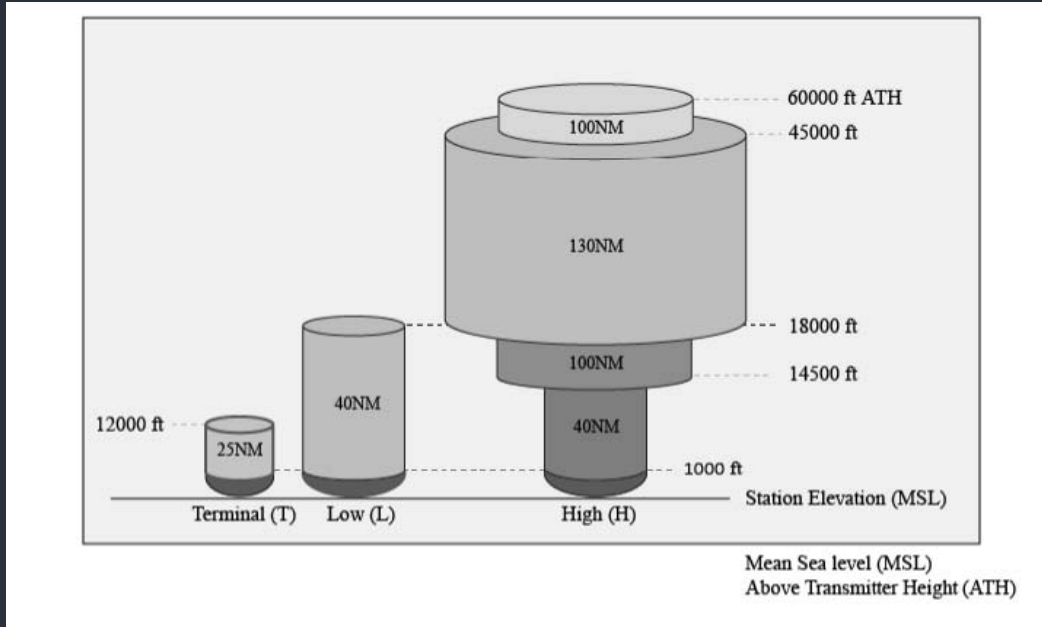

- Enter the three pieces of data we located above into the KNS-81 RNAV computer. Once the KNS-81 is powered on, all your data entered during previous flights will be loaded from memory, and the active “display”, and “use” data channels will be set to 1, and 1. First, we will use the dual concentric rotary knobs on the right of the unit to enter the frequency 112.5 Mhz into data channel 1, just as we would with any other navigation radio.



- Once our desired frequency has been set we will use the “DATA” push button to page through the three required pieces of data in this data channel in the order “FREQ”, “RAD”, and “DST”. Press the “DATA” button once, and then enter the radial 154.0, again with the dual concentric rotary knobs. Should your desired radial include a decimal component, the inner rotary knob can be pulled and rotated for decimal entry.



- When our desired radial is set, press the “DATA” push button once again to enter our desired distance offset of 12.3 nm. Again, should your desired distance include a decimal component, the inner rotary knob can be pulled and rotated for decimal entry.



- Data entry is now complete; however, before we can begin following the CDI to the airport, we need to choose an RNAV mode of operation, probably RNV/ENR for enroute operation, unless we need increased precision for some reason. Rotate the outer dual concentric rotary encoder on the left of the unit’s face until only “RNV” is annunciated above the knob. In RNAV modes of operation, our CDI will guide us to the displaced VOR waypoint at Beverly Airport that we just created, and all displayed DME information will be relative to that new waypoint



NOTE: VOR modes of operation WILL NOT provide CDI or DME information relative to the active waypoint. They are for operation as a conventional navigation radio with reference to existing VOR stations, in either angular or linear course deviation mode.

6. Lastly, make sure the HSI SOURCE switch in your aircraft is set to RNAV; otherwise, we will not see the RNAV information displayed on the HSI.



7. To fly directly to the displaced VOR waypoint at our destination airport, simply rotate the omni-bearing selector (OBS) or course (CRS) knob on your HSI, as you would to fly to a VOR, and follow the CDI needle with a TO indication. Countdown the distance and time remaining until arriving at your destination on the external DME instrument. When you have arrived, the TO/FROM indication will reverse, and DME distance will approach zero, just like with a conventional VOR receiver. Even at distances of 40 nm away from the actual VOR station, this system is usually precise enough to place your route of flight inside the airport perimeter fence at your destination.
8. To check your position relative to the actual VOR station you are receiving at any given time, press and hold the "CHK" button. The RAD and DST displays will now indicate your actual distance from the VOR station, and the radial upon which the aircraft sits. Release the "CHK" button to return to viewing RNAV information appropriate to the currently selected mode of operation.





## Using the JPI EDM-760 Engine Monitor




The Analog Baron is equipped with the most complete implementation of the EDM-760 engine monitor to appear in a flight simulator. The EDM-760 is one of the more common pieces of engine monitoring equipment found in general aviation aircraft, and is often underestimated in its power and utility due to its compact size. Aircraft owners would be wise to fully understand the information at their fingertips via the unit's trend monitoring to increase engine longevity and detect changes that may result in a catastrophic failure. In normal operation, the efficient and safe operation of a high performance engine is one of the most important skills that a pilot should learn when advancing from a simple training aircraft to a more complex long-distance cruising aircraft. For a complete understanding of the unit's functionality, please see the "More Information on Operation" section of this manual for training videos and operating manuals. The EDM-760 has two push buttons that provide all control of the unit; however, several functions require pressing both buttons at once. This is accomplished in MSFS via an invisible button at the bottom of the unit's bezel, between both buttons. The twin engine EDM-760 is very similar in appearance and operation to the single engine EDM-800, which is featured in the Analog Bonanza.

## Static Displays

Upon startup, the EDM-760 will perform a self-test and illuminate every segment of the display. At the top of the unit will be “L” and “R” characters, statically displayed, above the left and right engine temperature columns. To the left of this static display will be either a “°C” or “°F” to indicate the temperature units that will be displayed. To toggle between units, press both of the unit’s control buttons at once. Below these static displays are two more static displays with numerals 1-6, for each cylinder of each engine, and a final letter “T”, if the aircraft is turbocharged. These are column headers for each cylinder’s temperature bar, which will be discussed below. Lastly, four 14-segment displays at the bottom of the unit will display many different types of information, units, alarm ID’s, and more.

## Data Display

When the unit is powered on, the data display will be in manual mode for 10 minutes, at which time, it will enter automatic mode. In manual mode, the user can cycle through all available data by tapping the “STEP” button. To cycle through data in the opposite order to save oneself the trouble of cycling through all the data again, hold the “STEP” button for three seconds. To enter manual mode, tap “STEP” at any time. To enter automatic mode, tap “LEAN FIND” and then tap “STEP”. When data associated with a particular cylinder is being displayed, a dot below that cylinder’s header number will be displayed. When oil temperature or turbine inlet temperature (TIT) (in turbocharged aircraft only) is being displayed, a dot will be shown above the last column on the right. These conventions also apply in automatic mode, and when an alarm is being displayed. A switch to the right of the unit marked “EGT, ALL, FF”, allows the user to switch between groups of data to be displayed in automatic and manual modes. A summary of these groups, their data, and units follows.

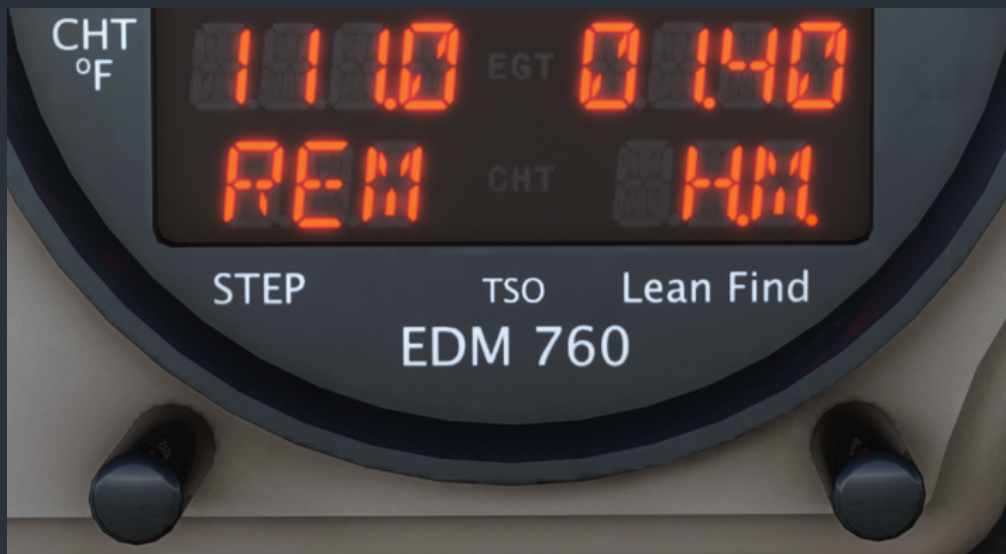

Select Switch	Description	Example		Requirements
EGT, ALL	Main Bus Voltage & Outside Air Temp.	25.7 BAT	75 OAT	None
EGT, ALL	Difference between hottest and coldest CHT.	52 DIF	61 DIF	None
ALL, FF	Fuel Remaining & Time to Empty (endurance in hours.minutes)	78.4 REM	01.28 H.M.	None
ALL, FF	Fuel Required to next GPS waypoint & Fuel Remaining at next GPS waypoint	17.4 REQ	61.0 REM	Compatible GPS
ALL, FF	Nautical Miles per Gallon & Estimated Range	5.2 MPG	407.5 NM	Compatible GPS
ALL, FF	Fuel Flow Rate	24.2 GPH	24.5 GPH	None
ALL, FF	Fuel Used since unit startup each engine	21.8 USD	21.4 USD	None
ALL, FF	Total Fuel Used since unit startup	43.2 GAL	TOTL USD	None
ALL, FF	Approximate Horsepower	285 HP	287 HP	None
EGT, ALL	EGT & CHT (cycles through all cylinders)	1412 392	1437 398	None
EGT, ALL	Turbine Inlet Temp. & Fuel Flow	1465 24.2	1468 24.5	Turbocharger
EGT, ALL	Oil Temp.	161 OIL	168 OIL	None
EGT, ALL	Fastest Cooling Cylinder Head (°/min)	-25 CLD	-28 CLD	None

## Temperature Columns


When the unit is in manual or automatic mode, the majority of the display will be occupied by the fourteen temperature columns. The six cylinder columns for each engine have two modes of operation, percent view, and normalized view. The unit defaults to percent view at startup, and normalized view can be activated by holding the “LEAN FIND” button for three seconds, which will illuminate “N” at the top right of the display, rather than a “P” for percent view.. In percent view, each column’s height represents that cylinder’s exhaust gas temperature (EGT) from one-half redline value, to redline value. The same scale applies to the turbine inlet temperature or oil temperature being displayed in the seventh column for each engine. Each of the twelve cylinder columns can also display cylinder head temperature (CHT), on a fixed

Fahrenheit scale, inscribed on the bezel of the unit, from 300°F to 525°F. The CHT will be displayed by either a single lit segment in the column when EGT is below CHT, or a single unlit segment when EGT is greater than CHT. When this scale is ambiguous, such as when the CHT and EGT column heights match, the single segment will blink continuously. In the normalized view, each column's height is set to exactly half of the total available column height, and all changes in EGT are displayed relative to the temperature they possessed when you activated the normalized view. Percent view should be used for most normal operation, and normalized view should be used during power level changes in-flight, and when troubleshooting a problem. The seventh column will display the oil temperature on a percent scale only when a turbocharger is not installed, otherwise, TIT will be displayed with the column, and oil temperature will be displayed as the single segment.



## Lean Find Mode

Tapping the “LEAN FIND” button will activate Lean Find mode, an intelligent engine leaning optimization feature that will help you optimally lean the engine’s mixture for best power, or best economy. When Lean Find mode is activated, “LEAN ROP” will be shown in the data display by default to indicate that the selected leaning method is rich of peak (ROP). To select lean of peak (LOP) leaning, hold both control buttons for three seconds until “LEAN LOP” is shown. This is the only time the leaning method can be toggled.

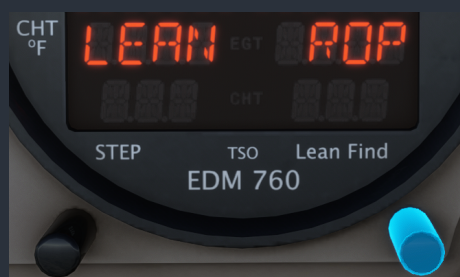

Both methods of leaning begin by “pre-leaning” the engine to approximately 50°F (28°C) EGT rich of peak on any cylinder. After waiting for temperatures to stabilize, begin leaning the engine. When a dot begins flashing above one of the cylinder columns to indicate the hottest cylinder, Lean Find mode is now armed, and an approximately 15°F (8°C) increase of average EGT has been observed.

NOTE: For your convenience while leaning, the friction lock knob located on the right of the throttle quadrant can be used to increase the fidelity of mixture control adjustments via the mouse wheel. Roll the friction lock clockwise (drag up) to make very fine adjustments to the mixture control. Use of this feature, or hall-effect based hardware controls, will be almost necessary for accurate leaning while at high density altitudes.

## Leaning Rich of Peak

Leaning “Rich of Peak”, as the name suggests, means operating the engine at mixture settings richer than peak EGT, usually in search of the most power from the engine. This is also known as “leaning for best power”, and can increase power by as much as 15% from peak values.

After completing the pre-leaning procedure above, continue leaning the mixture until one entire column begins flashing, and “PEAK EGT” is shown on the data display. This means that the peak EGT for the first cylinder to peak has been detected. Afterwards, the data display will show degrees relative to peak. Negative numbers indicate a mixture setting richer than peak. This configuration can be further monitored by pressing the “LEAN FIND” button, which will show the EGT of the first cylinder to peak, and the fuel flow relative to peak. Positive fuel flows indicate operating rich of peak.



The final step is to enrich the engine’s mixture setting to the desired EGT for best power cruise. At cruise power settings, this point is approximately 50-100°F (28-56°C) below peak EGT for best power. Keep in mind that this lower EGT results from a higher mixture setting, as opposed to LOP operation. This can be accomplished in either display mode, either by adjusting the raw EGT value, or by the relative EGT offset from peak. For rich of peak operation, the relative EGT should be negative, and the relative fuel flow should be positive. To return to automatic mode, tap “STEP” once.

## Leaning Lean of Peak

Leaning “Lean of Peak”, as the name suggests, means operating the engine at mixture settings leaner than peak EGT. This results in significantly lower fuel consumption, and extended range. This is also known as “leaning for best economy”, and can decrease fuel consumption by as much as 30% from peak values, for only a 5-10% loss in airspeed.

After completing the pre-leaning procedure above, continue leaning the mixture until one entire column begins flashing, and “LAST PK” is shown on the data display. This means that the peak EGT for the last cylinder to peak has been detected. The bar graph in LOP mode is shown in the form of a descending histogram to differentiate it from ROP mode. The left side of the data display now will show degrees relative to peak. Positive numbers indicate a mixture setting leaner than peak. This configuration can be further monitored by pressing the “LEAN FIND” button, which will show the EGT of the last cylinder to peak, and the fuel flow relative to peak. Negative fuel flows indicate operating lean of peak.



The final step is to lean the engine’s mixture setting to the desired EGT for best economy cruise. At cruise power settings, this point is approximately 25-50°F (14-28°C) below peak EGT for best power. Keep in mind that this lower EGT results from a lower mixture setting, as opposed to ROP operation. This can be accomplished in either display mode, either by adjusting the raw EGT value, or by the relative EGT offset from peak. For lean of peak operation, the relative EGT should be positive, and the relative fuel flow should be negative. To return to automatic mode, tap “STEP” once.

NOTE: While lean of peak operation is generally accepted as a good method to reduce fuel burn and increase engine longevity, most engine manufacturers only provide guidance for rich of peak operation. This means that the performance data in the aircraft’s operating handbook will most closely be reflected by rich of peak operation. It should also be noted that excessively lean mixtures can cause the engines to run rough, or become damaged. Lastly, it is more important to remember to enrich the mixture during descent when operating lean of peak, as the mixture may become too lean for combustion otherwise.

## Alarms

The EDM-760 is constantly monitoring all available engine and fuel flow parameters, and will activate an alarm to warn the operator of a potentially dangerous situation. When an alarm is activated, regardless of the current operational mode, the data display will show one of the alarm codes and associated values enumerated below, and blink continuously. An engine monitor alarm LED will also illuminate and flash continuously on the glareshield annunciator panel. To cancel the active alarm for ten minutes, tap the “STEP” button. To cancel the active alarm for the duration of the flight until the engine monitor is rebooted, hold the Lean Find button for three seconds. Since many simultaneous alarm conditions may exist at once, each alarm has a priority, allowing the most severe condition to be displayed first. The following list of alarm codes is listed in priority order, with the most severe condition listed first.



Description	Example	Low Limit	High Limit
High Cylinder Head Temp.	552 CHT		450 °F / 230 °C
High Exhaust Gas Temp.	1685 EGT		1650 °F / 900 °C
High Oil Temp.	240 OIL		230 °F / 110 °C
High Turbine Inlet Temp.	1781 TIT		1,650 °F / 900 °C
Low Oil Temp.	86 OIL	90 °F / 32 °C	
High Cylinder Head Cooling Rate	-84 CLD	-60 °F/min / -33 °C/min	
High Exhaust Gas Temp. Difference	587 DIF		500 °F / 280 °C
Battery Voltage (24V system)	23.4 BAT	24.0V	32.0V
Battery Voltage (12V system)	11.6 BAT	12.0V	16.0V
Low Fuel Quantity Remaining	FUEL 17.4 LOW GAL	20 gal	
Low Endurance Remaining	TIME 00.22 LOW H.M.	45 min	

# Normal Checklists

\*Pressurized Model Only

## Before Starting Engine

Preflight Inspection	Complete
Seats & Seatbelts	Secure
Cabin Doors	Latched
Parking Brake	Set
Emergency Gear Handle	Stowed
Avionics Breakers	All In
Flaps	Up
Avionics	Off
Throttles	Closed
Propeller	High RPM
Mixture	Full Rich
Cowl Flaps	Open
Aileron Trim	Centered
Rudder Trim	Centered
Landing Gear	Down
All Subpanel Switches	Off
Main Breakers	All In
Alternate Static Air	Normal
CO Detector	Test
Fuel Selectors	On
*Cabin Press Shutoff	Pushed
*Door Seal Standby Air	Off
*Cabin Press Mode	Dump
*Door Seal Mode	Off
Beacon Light	On
Battery Master	On
Bus Volts	23V Minimum
Annunciators	Test & Consider
Left Alternator	On
Right Alternator	On
Main Fuel Quantities	Check
Tip Tank Quantities	Check
Cabin Heater	As Desired
Left Boost Pump	Lo
Left Boost Pump	Audible
Left Boost Pump	Off
Right Boost Pump	Lo
Right Boost Pump	Audible
Right Boost Pump	Off

## Engine Start (Cold)

Right Mixture	Full Rich
Right Propeller	High RPM
Right Throttle	Full Open
Right Boost Pump	Hi for 2-3s
Fuel Flow	Greater than 3 GPH
Right Boost Pump	Off
Right Throttle	Open 1/2in
Right Starter	Engage
Right Throttle	1000-1200 RPM
Oil Pressure	Green
Start Annum	Extinguished

Low Volts Annum  
R ALT Annum  
Right Alternator Load  
Bus Volts  
Engine Instruments

Left Mixture  
Left Propeller  
Left Throttle  
Left Boost Pump  
Fuel Flow  
Left Boost Pump  
Left Throttle  
Left Starter  
Left Throttle  
Oil Pressure  
Start Annum  
Low Volts Annum  
L ALT Annum  
Left Alternator Load  
Bus Volts  
Engine Instruments

## Engine Start (Hot)

Right Mixture  
Right Propeller  
Right Boost Pump  
Right Boost Pump  
Right Mixture  
Right Throttle  
Right Boost Pump  
Fuel Flow  
Right Boost Pump  
Right Throttle  
Right Starter  
If No Start...  
  
Right Throttle  
Oil Pressure  
Start Annum  
Low Volts Annum  
R ALT Annum  
Right Alternator Load  
Bus Volts  
Engine Instruments

Left Mixture  
Left Propeller  
Left Boost Pump  
Left Boost Pump  
Left Mixture  
Left Throttle  
Left Boost Pump  
Fuel Flow  
Left Boost Pump  
Left Throttle  
Left Starter  
If No Start...

Extinguished  
Extinguished  
Below 25A in 2min  
28V  
Check

Full Rich  
High RPM  
Full Open  
Hi for 2-3s  
Greater than 3 GPH  
Off  
Open 1/2in  
Engage  
1000-1200 RPM  
Green  
Extinguished  
Extinguished  
Extinguished  
Below 25A in 2min  
28V  
Check

Cut-Off  
High RPM  
Hi for 10-20s  
Off  
Full Rich  
Full Open  
Hi for 2-3s  
Greater than 3 GPH  
Off  
Open 1/2in  
Engage  
Repeat

1000-1200 RPM  
Green  
Extinguished  
Extinguished  
Extinguished  
Below 25A in 2min  
28V  
Check

Cut-Off  
High RPM  
Hi for 10-20s  
Off  
Full Rich  
Full Open  
Hi for 2-3s  
Greater than 3 GPH  
Off  
Open 1/2in  
Engage  
Repeat



Left Throttle	1000-1200 RPM
Oil Pressure	Green
Start Annun	Extinguished
Low Volts Annun	Extinguished
L ALT Annun	Extinguished
Left Alternator Load	Below 25A in 2min
Bus Volts	28V
Engine Instruments	Check

## Engine Start (Flooded)

Right Mixture	Lean
Right Propeller	High RPM
Right Throttle	Open 1/2in
Right Starter	Engage
Right Throttle	Advance Until Start
Right Throttle	Idle
Right Mixture	Full Rich
Oil Pressure	Green
Start Annun	Extinguished
Low Volts Annun	Extinguished
R ALT Annun	Extinguished
Right Alternator Load	Below 25A in 2min
Bus Volts	28V
Engine Instruments	Check

Left Mixture	Lean
Left Propeller	High RPM
Left Throttle	Open 1/2in
Left Starter	Engage
Left Throttle	Advance Until Start
Left Throttle	Idle
Left Mixture	Full Rich
Oil Pressure	Green
Start Annun	Extinguished
Low Volts Annun	Extinguished
L ALT Annun	Extinguished
Left Alternator Load	Below 25A in 2min
Bus Volts	28V
Engine Instruments	Check

## After Starting

Lights	As Required
Weather Radar	Off/Standby
Avionics	On
Cabin Air & Heat	As Desired
Air Conditioning	As Desired
Mixture	Lean for Taxi
Parking Brake	Release
Brakes	Check

## Starter Does Not Disengage

Alternators	Off
Battery Master	Off
Mixture	Cut-Off
Magnetos	Off

## Runup

Parking Brake	Set
Annunciators	Test & Consider
Remote Compass	Slaved & Aligned
Mixture	Full Rich
Throttle	1700 RPM
Exercise Left Propeller	To 300 RPM Drop
Exercise Right Propeller	To 300 RPM Drop
Check Left Magnetos	150 RPM Drop Max
Check Right Magnetos	150 RPM Drop Max
Instrument Air	Green & No Lights
Left Alternator	Off
L ALT Annun	Illuminated
Left Alternator Load	Zero
Right Alternator	Off
R ALT Annun	Illuminated
Right Alternator Load	Zero
Left Alternator	On
L ALT Annun	Extinguished
Left Alternator Load	Above 10A
Right Alternator	On
R ALT Annun	Extinguished
Right Alternator Load	Above 10A
Propeller Heat	On
Propeller Amps	20-25A & Cycles
Propeller Heat	Off
Windshield Heat	On
WSHLD HEAT Annun	Illuminated
Ammeters	Increase
Windshield Heat	Off
Left Pitot Heat	On
PITOT HEAT Annun	Illuminated
Ammeters	Increase
Right Pitot Heat	On
Ammeters	Increase
Fuel Vent Heat	On
Ammeters	Increase
Stall Warning Heat	On
Ammeters	Increase
Heating Switches	Off
Surface Deice	Manual
Boot Pressure	15-20 psi
BOOT PRESS Annun	Illuminated
Surface Deice	Auto
Boot Pressure	15-20 psi
Boot Press Annun	Cycles
Surface Deice	Off
*Cockpit Window	Closed
*Throttle	2000 RPM
*Cabin Altitude	Field Elevation
*Cabin Differential	Zero
*Cabin Climb Rate	10 O'Clock
*Cabin Altitude Goal	1000ft below field elev.
*Cabin Press Mode	Press.
*Door Seal Mode	Press.
*Cabin Press Test	Hold
*Cabin Alt, Diff & Climb	Observe Descent
*Cabin Altitude Goal	Set First Assigned Alt
*Cabin Press Mode	Dump
*Door Seal Mode	Off

Throttle	1000-1200 RPM
Electric Trim	Exercise
Autopilot	Test
Heading Bug	30 Degrees Left
Autopilot Master	Engage
Heading Mode	Engage
Yoke Movement	Observe
Flight Director	Bank Left
Heading Bug	30 Degrees Right
Yoke Movement	Observe
Flight Director	Bank Right
Autopilot Disconnect	Press AP Off
Autopilot Disconnect	Press FD Off
Elevator Trim	Set Takeoff
Flaps	Check Operation
Flaps	Set Takeoff
Windows	Closed
AFT DOOR Annu	Extinguished
Flight Controls	Free & Correct
Altimeter	Set
Departure Altitude	Set
Takeoff Heading	Set
Panel Lights	Dim for Takeoff
Parking Brake	Release

## Before Takeoff

*Cabin Press Mode	Press.
*Door Seal Mode	Press.
Mixture	Max Power
Oil Temperatures	24c Minimum
Boost Pumps	Off
Air Conditioning	Off
Landing Lights	On
Transponder	Alt Mode
Weather Radar	On

## Takeoff

Throttles	Full Open
Brakes	Release
Engine Instruments	Check
Landing Gear Up	Positive Rate
Flaps	Retract at 100kts
Autopilot	Engage
*Cabin Alt, Diff & Climb	Observe Climb

## Max Continuous Power

Mixture	Max Power
Propeller	2700 RPM
Throttle	Full Open
Cowl Flaps	As Required
Air Conditioning	As Desired
Cabin Heater	As Desired
Prop Sync	On

## Enroute Climb

Mixture	Max Power
Propeller	2500 RPM
Throttle	Full Open *36.0 MP
Cowl Flaps	As Required
*Cabin Pressure	Monitor
Air Conditioning	As Desired
Cabin Heater	As Desired
Engine Performance	Monitor

## Cruise

Cowl Flaps	Close
Landing Lights	Off
Pitot Heat	On if OAT less than 4c
Windshield Heat	As Required
Propeller Heat	As Required
Surface Deice	As Required
Fuel Imbalance	15 gal Max.
Tip Tank Transfer	As Required
Lean Mixture	LOP or ROP
Propeller	2500 RPM
Throttle	Full Open *33.0 MP
Cabin Air & Heat	As Desired
Air Conditioning	As Desired
Cabin Heater	As Desired
*Cabin Pressure	Monitor
Engine Performance	Monitor

## Descent

*Cabin Altitude Goal	Set Destination Alt
Cowl Flaps	Closed
Throttle	Reduce
Mixture	Enrichen
Engine Performance	Monitor
Cylinder Head Temp	116c Min.
Tip Tank Transfer	As Required

## Approach

Seats & Seatbelts	Secure
*Cabin Alt, Diff & Climb	Check Progress
Fuel Selectors	On
Fuel Imbalance	15 gal Max.
Tip Tank Transfer	As Required
Landing Lights	On
Pitot Heat	On if OAT less than 4c
Windshield Heat	Off
Propeller Heat	Off
Air Conditioning	Off
Cowl Flaps	As Required
Mixture	Max Power
Flaps	Approach

## Landing

*Cabin Differential	Zero
Propellers	High RPM
Mixture	Max Power
Flaps	As Required
Landing Gear	Down & Locked
Autopilot Disconnect	Press Once

## After Landing

Cowl Flaps	Open
Flaps	Up
*Cabin Alt, Diff & Climb	Verify Zero
*Cabin Press Mode	Dump
*Door Seal Mode	Off
Weather Radar	Off/Standby
Lights	As Required
Ice Protection	All Off
Air Conditioning	As Desired
Cabin Air & Heat	As Desired

## Shutdown & Securing

Parking Brake	Set
Avionics	Off
All Subpanel Switches	Off
Throttles	Closed
Propellers	High RPM
Mixture	Cut-Off
Magnetos	Off
Alternators	Off
Battery Master	Off
Parking Brake	Release

## Instrument Markings & Colors

### Manifold Pressure (Normally Aspirated):

15.0-29.6 inHg (GREEN)  
29.6 inHg (RED)

### Manifold Pressure (Turbocharged):

15.0-39.5 inHg (GREEN)  
39.5 inHg (RED)

### Propeller RPM:

1800-2700 RPM (GREEN)  
2700 RPM (RED)

### Fuel Flow (Normally Aspirated):

0-27.5 gal/hr (GREEN)  
27.5 gal/hr (RED)

### Fuel Flow (Turbocharged):

0-40.0 gal/hr (GREEN)  
40.0 gal/hr (RED)

### Cylinder Head Temperature:

120-238 °C (GREEN)  
238 °C (RED)

### Exhaust Gas Temperature:

20 °C per division

### Oil Temperature:

22 °C (YELLOW)  
22-116 °C (GREEN)  
116 °C (RED)

### Oil Pressure:

30 psi (RED)  
30-38 psi (YELLOW)  
38-100 psi (GREEN)  
100 psi (RED)

### Main Fuel Quantity:

0 lbs / 0 gal (MINIMUM)  
516 lbs / 86 gal (MAXIMUM)  
0-120 lbs / 0-20 gal (YELLOW)

### Tip Tank Fuel Quantity:

0 lbs / 0 gal (MINIMUM)  
90 lbs / 15 gal (MAXIMUM)

### Oxygen Pressure:

0-200 psi (RED)  
1850-2200 psi (GREEN)

### Vacuum Suction:

2.5-3.5 inHg (YELLOW)  
3.5-5.5 inHg (GREEN)  
5.5-6.5 inHg (YELLOW)

### Propeller Ammeter:

0-30 amps

### Airspeed Indicator:

SEE V-SPEEDS

# Abnormal & Emergency Checklists

## Engine Fire (Ground)

Fuel Selectors	Off
Mixture	Cut-Off
Alternators	Off
Battery Master	Off
Magnetos	Off

## Engine Failure (Ground Roll)

Throttles	Closed
Braking	Maximum
Fuel Selectors	Off
Alternators	Off
Battery Master	Off

## Engine Failure (Takeoff)

Landing Gear Up	Up
Flaps	Retract above 85kts
Inoperative Engine	Identify
Inop. Eng. Throttle	Closed
Inop. Eng. Propeller	Feather
Airspeed	Maintain 100 kts
Inop. Eng. Mixture	Cut-Off
Inop. Eng. Fuel Selector	Off
Inop. Boost Pump	Off
Inop. Eng. Magnetos	Off
Inop. Eng. Alternator	Off
Cowl Flaps	Closed
Alternator Load	80A Max.

## Engine Failure (In Flight)

Airspeed	115 kts
Inoperative Engine	Identify
Inop. Eng. Throttle	Closed
Inop. Eng. Propeller	Feather
Fuel Selector	Inop. Eng. Crossfeed
Inop. Eng. Magnetos	Check Both
Inop. Eng. Boost Pump	Hi
Inop. Eng. Mixture	Rich then Lean
Inop. Eng. Starter	Engage
Inop. Eng. Engine	If No Restart...
Inop. Eng. Boost Pump	Off
Inop. Eng. Mixture	Full Rich
Inop. Eng. Magnetos	Check Both
Inop. Eng. Starter	Engage
Inop. Eng. Engine	If No Restart...
Nearest Airport	Select
Inop. Eng. Fuel Selector	Off
Inop. Eng. Boost Pump	Off

Inop. Magnetos	Off
Inop. Alternator	Off
Cowl Flaps	Closed
Alternator Load	80A Max.

## Rough Running Engine

Boost Pump	Lo
Mixture	Rich then Lean
Magnetos	Check Both

## Engine Fire (Flight)

Inop. Eng. Fuel Selector	Off
Inop. Eng. Mixture	Cut-Off
Inop. Eng. Alternator	Off
Inop. Eng. Magneto	Off
Inop. Eng. Engine	Do Not Restart

## Emergency Descent

Throttles	Close
Propellers	High RPM
Landing Gear	Down
Flaps	Approach
Airspeed	152 kts

## Maximum Glide

Landing Gear	Up
Flaps	Up
Cowl Flaps	Close
Propellers	Feathered
Airspeed	115 kts
Air Conditioning	Off
Cabin Heater	Off
Nonessential Equipment	Off

## Electrical Smoke or Fire

Alternators	Off
Battery Master	Off
Windows	Open
Avionics	Off
Air Conditioning	Off
Cabin Heater	Off
Electrical Equipment	Off
Cabin Air & Heat	Off
Avionics Relay	Off
Observe	If No Fire...
Battery Master	On
Restore Essential Power	Circuit by Circuit

Avionics	On
Avionics Relay	On
Restore Avionics Power	Circuit by Circuit

Cabin Air	Full Open
Nonessential Equipment	Off

## High Pressure Differential

Cabin Altitude Goal	Set Higher Altitude
Cabin Climb	If No Descent...
Cabin Press Shutoff	Pull
Cabin Press Mode	Dump
Differential Press	Green
Diff Press Annun	If Extinguished...
Cabin Press Mode	Press.
Cabin Press Shutoff	Push

## Alternator Failure

Alternator Load	Verify No Load
Inop. Eng. Alternator	Reset
Inop. Eng. Alternator Load	If No Load...
Inop. Eng. Alternator	Off
Alternator Load	80A Max.
Alternator Load	If Dual Failure...
Nonessential Equipment	Off
Land	As Soon as Practical

## Cabin Depressurization

Cabin Alt Annun	If Illuminated...
Emergency Descent	Begin
Cabin Press Test	Hold
Cabin Climb	If no Climb Observed...
Pressurization Circuit Breakers	Check/Reset
Cabin Press Test	Hold
Cabin Climb	If no Climb Observed...
Door Seal Annun	If Illuminated...
Door Seal Standby Air	On
Door Seal Standby	Hold
Door Seal Annun	If Illuminated...
Cabin Press Shutoff	Pull

## Dual Instrument Air Failure

Land	As Soon as Practical
------	----------------------

## Severe Icing Encounter

Ice Protection	All On
Wing Light	On
Ice Build-Up	Monitor
Propellers	High RPM
Cowl Flaps	Closed
Cabin Heater	On
Cabin Air & Heat	On Maximum
Defroster	On Maximum

## Turbocharger Failure

Observe	If No Fire...
Throttles	Advance
Manifold Pressure	If Still Low...
Restart Engine	If Necessary...
Mixture	Lean Max Power
Cabin Press Shutoff	Pull
Land	At Nearest Airport

## Remote Compass Misalignment

Gyro Slave Circuit Breaker	Pull & Reset
Remote Compass Alignment	If Misaligned...
Remote Compass	Free Mode
Compass Position	Slew to Mag. Heading

## Autopilot Failure or Trim Runaway

Autopilot	Disconnect
Autopilot Circuit Breakers	Pull Off

## Carbon Monoxide Detected

Cabin Heater	Off
Cabin Air & Heat	Close (Push)
CO Detector	Reset
CO Alarm	If Persists...
Cabin Press Shutoff	Pull
CO Alarm	If Persists...
Throttle	Closed
Mixture	Cut-Off
Propellers	Feathered
Magnetos	Off
Windows	Open

## AC DOOR EXTEND Illuminated in Flight

Air Conditioning	Discontinue Use
Increased Drag	Anticipate

## Landing Gear Manual Extension

Airspeed	152 kts or Less
Landing Gear Relay	Pull Off
Landing Gear	Handle Down
Emergency Gear Handle	Engage
Crank Handle	50 Turns
Gear Warning	Push On
Gear Indicators	Three Green
Emergency Gear Handle	Stow

## Landing Gear Up after Man Ext

Emergency Gear Handle	Stowed
Landing Gear Relay	Push On
Landing Gear	Handle Up

## Flap Failure

Flap Breakers	Check On
Bus Volts	23V Minimum
Flaps	As Required
Flap Indicators	Check
Flaps	Visually Check

## Balked Landing

Mixture	Max Power
Propellers	2700 RPM
Throttles	Full Open
Cowl Flaps	Open
Engine Instruments	Check
Landing Gear Up	Positive Rate
Flaps	Retract at 100kts

## No Power Landing

Fuel Selectors	Off
Mixture	Cut-Off
Magnetos	Off
Flaps	As Required
Landing Gear	Down & Locked
Alternators	Off
Battery Master	Off

## More Information on Operation

Black Square aircraft are created by an avid pilot who believes that every switch, knob, and button should be interactable, and the user should be able to follow real world procedures without compromising results from the simulation. This aircraft was designed and tested using real world handbooks and procedures, and leaves little to the imagination in terms of functionality. For the most immersive experience, it's recommended that you seek out manuals, handbooks, checklists, and performance charts from the real aircraft represented in this simulation. Although this aircraft and simulation is not suitable for real world training, and should not be used for such, every effort has been taken to ensure that the simulation will represent the real aircraft until the fringe cases of instrument flying, or system failure.

In the case of this particular product, featuring the KNS-81 Navigation System, and the RDR 1150XL, additional resources are available online for the real world counterparts of these units. In particular the [“KNS-81 Pilot’s Guide”](#), available on Bendix/King’s website, and the [“Weather Radar Pilot Training DVD”](#) on Bendix/King’s YouTube channel. There are also comprehensive video tutorials for the EDM-700/800 on Youtube. You will find one complete overview of the instrument under the title of [“JPI EDM 760 Overview, display features, and leanfind mode”](#).

# Frequently Asked Questions

## Will I still be able to fly the default G1000 G58 Baron?

Absolutely! The default G58 Baron will be unaffected by this product, and will always be available in the aircraft selection menu. The two installations may sit side-by-side without interference; however, we think that once you've flown the analog systems, you won't want to go back to the generic LCD displays of the default aircraft!

## Are liveries for the default MSFS G58 Baron Compatible?

Yes! They are all compatible, as they only affect the exterior model, and they can be easily integrated into this product. For more information, see the "Liveries" section of this manual.

## Why is the GTN 750 GPS screen black?

Make sure you have the PMS GTN 750 or TDS GTNxi 750 installed properly in your community folder. The mod can be obtained for free from the following link. Installation instructions are included in the "Installation, Updates & Support" section of this manual.

<https://pms50.com/msfs/downloads/gtn750-basic/>

## Why do my GNS 430/530 displays not look like the screenshots?

Make sure you have the Working Title GNS 530/430 mod installed properly. The mod can be obtained for free from the in-game marketplace while it is still in beta. Installation instructions are included in the "Installation, Updates & Support" section of this manual.

## Why won't the autopilot track to the KNS-81 RNAV waypoint?

Unfortunately, it is not possible to drive the stock MSFS autopilot system with a custom navigation source without implementing a whole new autopilot (to the best of my knowledge). It is recommended that you simply steer the autopilot via the heading bug with reference to the RNAV course deviation shown on the CDI.

## Why is the state of my aircraft and radios not saved/recalled?

In order for the MSFS native state saving to work correctly, you must shut down MSFS correctly via the main menu, by clicking "Quit to Desktop", NOT by pressing the red "X" on the application window, or otherwise terminating the application window.



## Do I need to have the original default aircraft installed?

Yes, but also no. This product uses models, textures, and sound from the original default; therefore, you must have it installed for this product to be able to find those files. If you do not, the exterior model might not appear, or there might be pink checkerboard textures in the cockpit, or there might be no sound. However, if you really want to uninstall the default aircraft for some reason, it is possible for advanced users to copy over the necessary files and link them in this aircraft's aircraft.cfg, and model.cfg.

## Why can't I see the exterior of the aircraft, or why are there pink checkerboard textures on the inside of the cockpit?

Some files are shared between this product and the default aircraft in MSFS. Unlike the other Black Square aircraft, **the Analog Baron REQUIRES THE DELUXE OR PREMIUM VERSIONS OF MSFS to work.** The files are located within your existing installation by reference, so if you do not have the necessary default aircraft installed, you will not have an exterior model, some textures, or sound. See the above question for more information.

## Why does the engine not fail when limits are clearly exceeded?

The engine will not fail immediately upon limit exceedances, as is true of the real engine. Different engine parameters contribute differently to reducing the health of the engine. The "Engine Stress Failure" option must also be enabled in the MSFS Assistance menu for the engine to fail completely. Engine condition can be monitored on the "SYSTEMS" page of the weather radar by rotating its mode knob to "NAV".

## Why don't the doors open?

Since this product uses the default exterior model for the Baron, it is beholden to the limitations of that model. Nothing can be done to add this functionality to a model that doesn't have it. Mods that create opening doors for default aircraft, like the C152 and TBM-930, either already have opening doors in the exterior model, or alter the exterior model, which cannot be distributed as part of a paid product.

## I have the TDS or PMS GTN 750 installed. Why do they not automatically show up on the panel?

The "automatic detection" of the TDS or PMS software refers to automatic switching between the freeware PMS, and the TDS or PMS payware products. There are six different choices for avionics available for this aircraft that must be manually selected with the two selector switches located to the left of the copilot's yoke. Your avionics selection is automatically saved and restored between sessions. For more information on selecting different avionics, see the "Avionics" section of this manual.

## Why does the mixture behave strangely in the turbocharged version, and I cannot bind it to hardware controls?

Microsoft Flight Simulator's turbocharger simulation has been significantly flawed for several generations. This aircraft has a custom turbocharger that fixes nearly all of these issues, and is much more realistic, as a result. To make these changes, the new "Input Event" system is used to intercept hardware and key-bindings for the mixture control axis. Please make sure that your hardware bindings are using the Key Events, such as "K:MIXTURE1\_DECR\_SMALL", or "K:MIXTURE1\_SET" to set the mixture, and not setting either "A:GENERAL ENG MIXTURE LEVER POSITION:1", or "B:FUEL\_Mixture\_1\_Set". Alternatively, setting "L:BKSQ\_MixtureLeverPosition\_1" from 0-100 will also work to set the mixture axis.

## Why can't I start the engines?

The Analog Baron simulates many features of real world fuel injected engine operation that some users may not be familiar with. Understanding the checklists for hot, cold, and flooded engine starts should provide a successful engine start. Recall that fuel injected engines must be primed with an electric fuel pump before starting, and may succumb to vapor lock after recently running. Flooded engines will also be difficult to start, requiring an advanced throttle setting to produce a combustible air-to-fuel ratio.

## Why is the autopilot behaving strangely, not changing modes, or not capturing altitudes?

This, and many other aircraft, recently required updates to make them compatible with the new Working Title GNS 530, which is available in the in-game marketplace. This GPS caused significant unintended consequences with hot-swappable avionics, such as are in this aircraft. Please make sure that you have updated all the avionics packages that you are using, including the TDS GTNxi 750, the PMS50 GTN 750, and the WT GNS 530. Please see the changelog and "Third Party Navigation & GPS Systems" section of this manual for more information.

## Is this compatible with the G58 Baron Improvements Mod?

Yes, both the Analog Baron will appear as a separate aircraft in the aircraft selection menu, while the Baron Improvements Mod modifies the default aircraft directly. You will still be able to fly the modified G58 Baron, and the Analog B58 Baron. This question specifically pertains to the "Baron Improvements Mod". There is no guarantee that other mods will not modify the core G58 Baron files that the Analog Baron depends on. Should this occur, it will most likely affect only the sounds of the Analog Baron, and a compatibility mod is always possible.

# Change Log

## v1.0 - Initial Release

### New Features:

- Autopilot engagement is now MUCH smoother, with the aircraft maintaining its present attitude unless commanded to do otherwise. The PID reset mode is set to “current aircraft state” now, which resets the integrator upon engagement.
- Event ID bindings have been added for the ignition switch, alternator, and standby alternator. This should allow users to use their hardware without having to change event bindings. The following are examples of acceptable key events: MAGNETO\_OFF, MAGNETO\_LEFT, MAGNETO\_RIGHT, MAGNETO\_BOTH, MAGNETO\_START, MAGNETO1\_OFF, MAGNETO1\_LEFT, MAGNETO1\_RIGHT, MAGNETO1\_BOTH, MAGNETO1\_START, SET\_STARTER1\_HELD, SET\_STARTER\_ALL\_HELD, TOGGLE\_ALL\_STARTERS, TOGGLE\_STARTER1, MAGNETO\_INCR, MAGNETO\_DECR, MAGNETO1\_INCR, MAGNETO1\_DECR, TOGGLE\_MASTER\_ALTERNATOR, TOGGLE\_MASTER\_BATTERY\_ALTERNATOR, TOGGLE\_ALTERNATOR1, ALTERNATOR\_OFF, ALTERNATOR\_ON, TOGGLE\_ALTERNATOR2.

### Bug Fixes:

- Landing and taxi lighting intensity doubled.
- Storm window reflections were ugly. Fixed.
- EDM-760 engine alarm LED functionality restored.
- Cylinder temperature aircraft pitch effect smoothed. This will reduce the apparent rate of cylinder cooling due to aircraft pitch changes, which could sometimes manifest in engine damage during abrupt pitch inputs.
- KRA-10 Radar Altimeter off-scale high needle parking position corrected to below mask, not in the hashed “OFF” range at the bottom of the scale.
- Engine cylinder head and oil temperature damage progression reduced.
- Cockpit Left Quick-View camera fixed.
- VR default cockpit camera entry added.
- Nose heaviness reduced significantly.
- KI-229 RMI visuals improved to match real world unit.
- Propeller synchrophaser indicator direction was reversed, and could sometimes become stuck when the right engine was running at higher speeds.
- Cabin climb rate gauge had a graphical glitch around periphery in preview videos. Fixed.
- Maneuvering Speed corrected from 122 kts to 156 kts in the manual and cockpit placard.

## Credits

Analog Baron  
Publishing  
Manual  
Testing

Nicholas Cyganski  
Just Flight  
Nicholas Cyganski  
Just Flight Testing Team

## Dedication

My first aircraft for MSFS, the Velocity XL, was dedicated to my father, as I owe him for making me the technical thinker and engineer that I am today; however, I would be remiss not to credit my mother, Janet Cyganski, for giving me my start in aviation. Though she has always been somewhat of a nervous flyer, and never pursued a career in engineering, my mother gifted me my first flying lesson at the age of 16. We rarely have the pleasure of knowing when a single decision has affected the outcome of our lives, so we are forced to ascribe meaning to certain milestones instead. As any pilot knows, your first flight lesson tends to be one of those landmark moments. I also have my mother to thank for teaching me all the life skills that are often overlooked by technical thinkers, yet play just as significant of a role in determining success. Most impressively, my mother has also been able to put up with two engineers as her only close relatives for many years now, and that kind of fortitude deserves recognition.

## Copyright

©2023 Nicholas C. Cyganski. All rights reserved. All trademarks and brand names are trademarks or registered trademarks of the respective owners and their use herein does not imply any association or endorsement by any third party.



**ALSO AVAILABLE**



**Black Square**

**ANALOG BONANZA**

For Microsoft Flight Simulator

**Just Flight**



**Black Square**

**ANALOG CARAVAN**

For Microsoft Flight Simulator

**Just Flight**



**Black Square**

**ANALOG KING AIR**

For Microsoft Flight Simulator

**Just Flight**

**Black Square**

**REAL TAXIWAYS**

